


Mounting plate

SPACE SAVING

*Air*STREAM

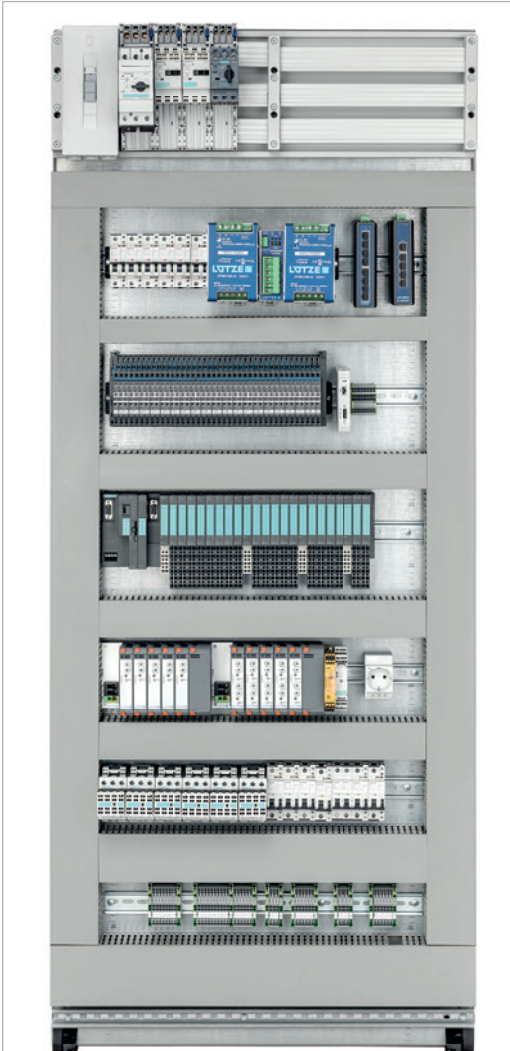

30% space saving

Integrated wiring level


Optimum positioning of the components

More space between components

Reduction of the size of the control cabinet

No cable ducts


Longer service life of the components

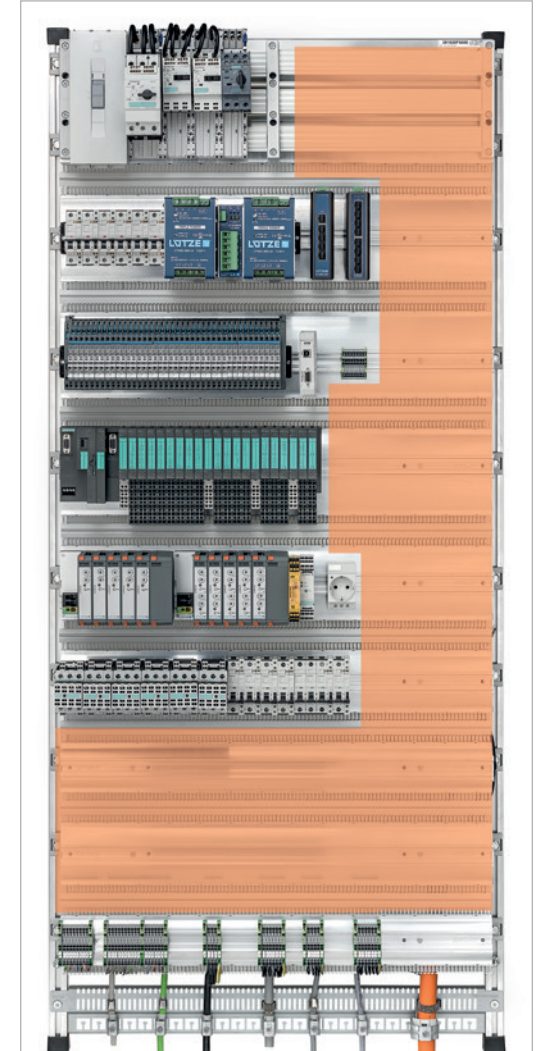

COST COMPARISON

| Mounting plate | | AirSTREAM | |
|---|-----------------|---|-----------------|
| Process | Costs | Process | Costs |
| Control Cabinet HWD 2000 x 1200 x 500 | £674.05 | Control Cabinet HWD 1800 x 1000 x 500 | £597.74 |
| Material costs Hat profiles, ducts, screws | £220.44 | Material costs AirSTREAM frame | £381.54 |
| Processing mounting plate 8h at £29.68/h | £237.40 | Processing AirSTREAM 0,25h at £29.68/h | £7.63 |
| Wiring time 12h at £38.15/h | £457.84 | Wiring time 9h at £38.15/h | £343.38 |
| | | Other* | |
| Total | £1589.73 | Total | £1330.29 |
| | | Savings | £259.44 |

Calculated @ 1€ = £0.85

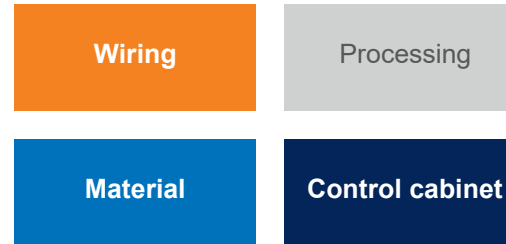

*** Further saving potential**

- Transport depending on the distance / collective shipment
- Weight savings of up to 10kg
- Wires / cables length reduction approx. 5%
- Quicker & easier placement of parts
- Stainless steel cabinets approx. £169.57 in one width and approx. £339.14 in one height

