

Control Solutions

LÜTZE Relays

Relays

Solid State Relay

TECHNIK MIT SYSTEM

Efficiency in Automation

Cable • Connectivity • Cabinet • Control



Cable Solutions



Connectivity Solutions



Cabinet Solutions



Control Solutions



Transportation Solutions



Welcome to LÜTZE

LÜTZE - Efficiency in Automation


A tradition in automation for over 60 years, with countless pioneering achievements and patents, the international LÜTZE Group is today one of the leading companies in the automation industry. LÜTZE supplies very efficient electronic and electrotechnical components, system solutions for automation and high tech for rail engineering.

The comprehensive and coordinated supply program ranges from highly flexible cables and pre-fabricated cables, to energy efficient *Air***STREAM** wiring systems for control cabinets through to intelligent Industry 4.0 solutions from the fields of interface technology, current monitoring, power supply and Ethernet infrastructure.

The Lütze Group has sales companies throughout Europe, Asia and the USA and numerous sales partners across the world to provide global product availability and service to our customers in all markets.

LÜTZE is one of the leading suppliers in the rail technology field. LÜTZE transportation solutions are installed in numerous locomotives, city rail and underground rail systems, as well as high-speed trains across the world.

LÜTZE®
TECHNIK MIT SYSTEM

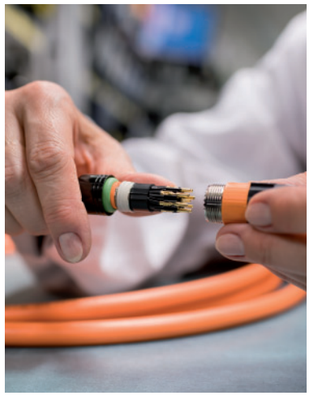

What moves us:
Quality, innovation, eff iciency

A prime example of competence in cables: In addition to manufacturing expertise, our cable assembly specialists are familiar with all cable types and offer genuine added value. The decisive advantage: We're cable experts – since 1958.

LÜTZE SUPERFLEX® connected



The people at LÜTZE


Quality, innovation and efficiency begin with people. We would not be where we are today without our highly qualified and motivated employees. An uncompromising focus on quality, nearly 60 years of experience in automation technology and of course a common desire for greater innovation and efficiency – that's what makes LÜTZE so successful.

The people at LÜTZE are familiar with automation applications and technologies across all disciplines, as they are involved with our broad range of products comprising four product areas Cable, Connectivity, Cabinet and Control.







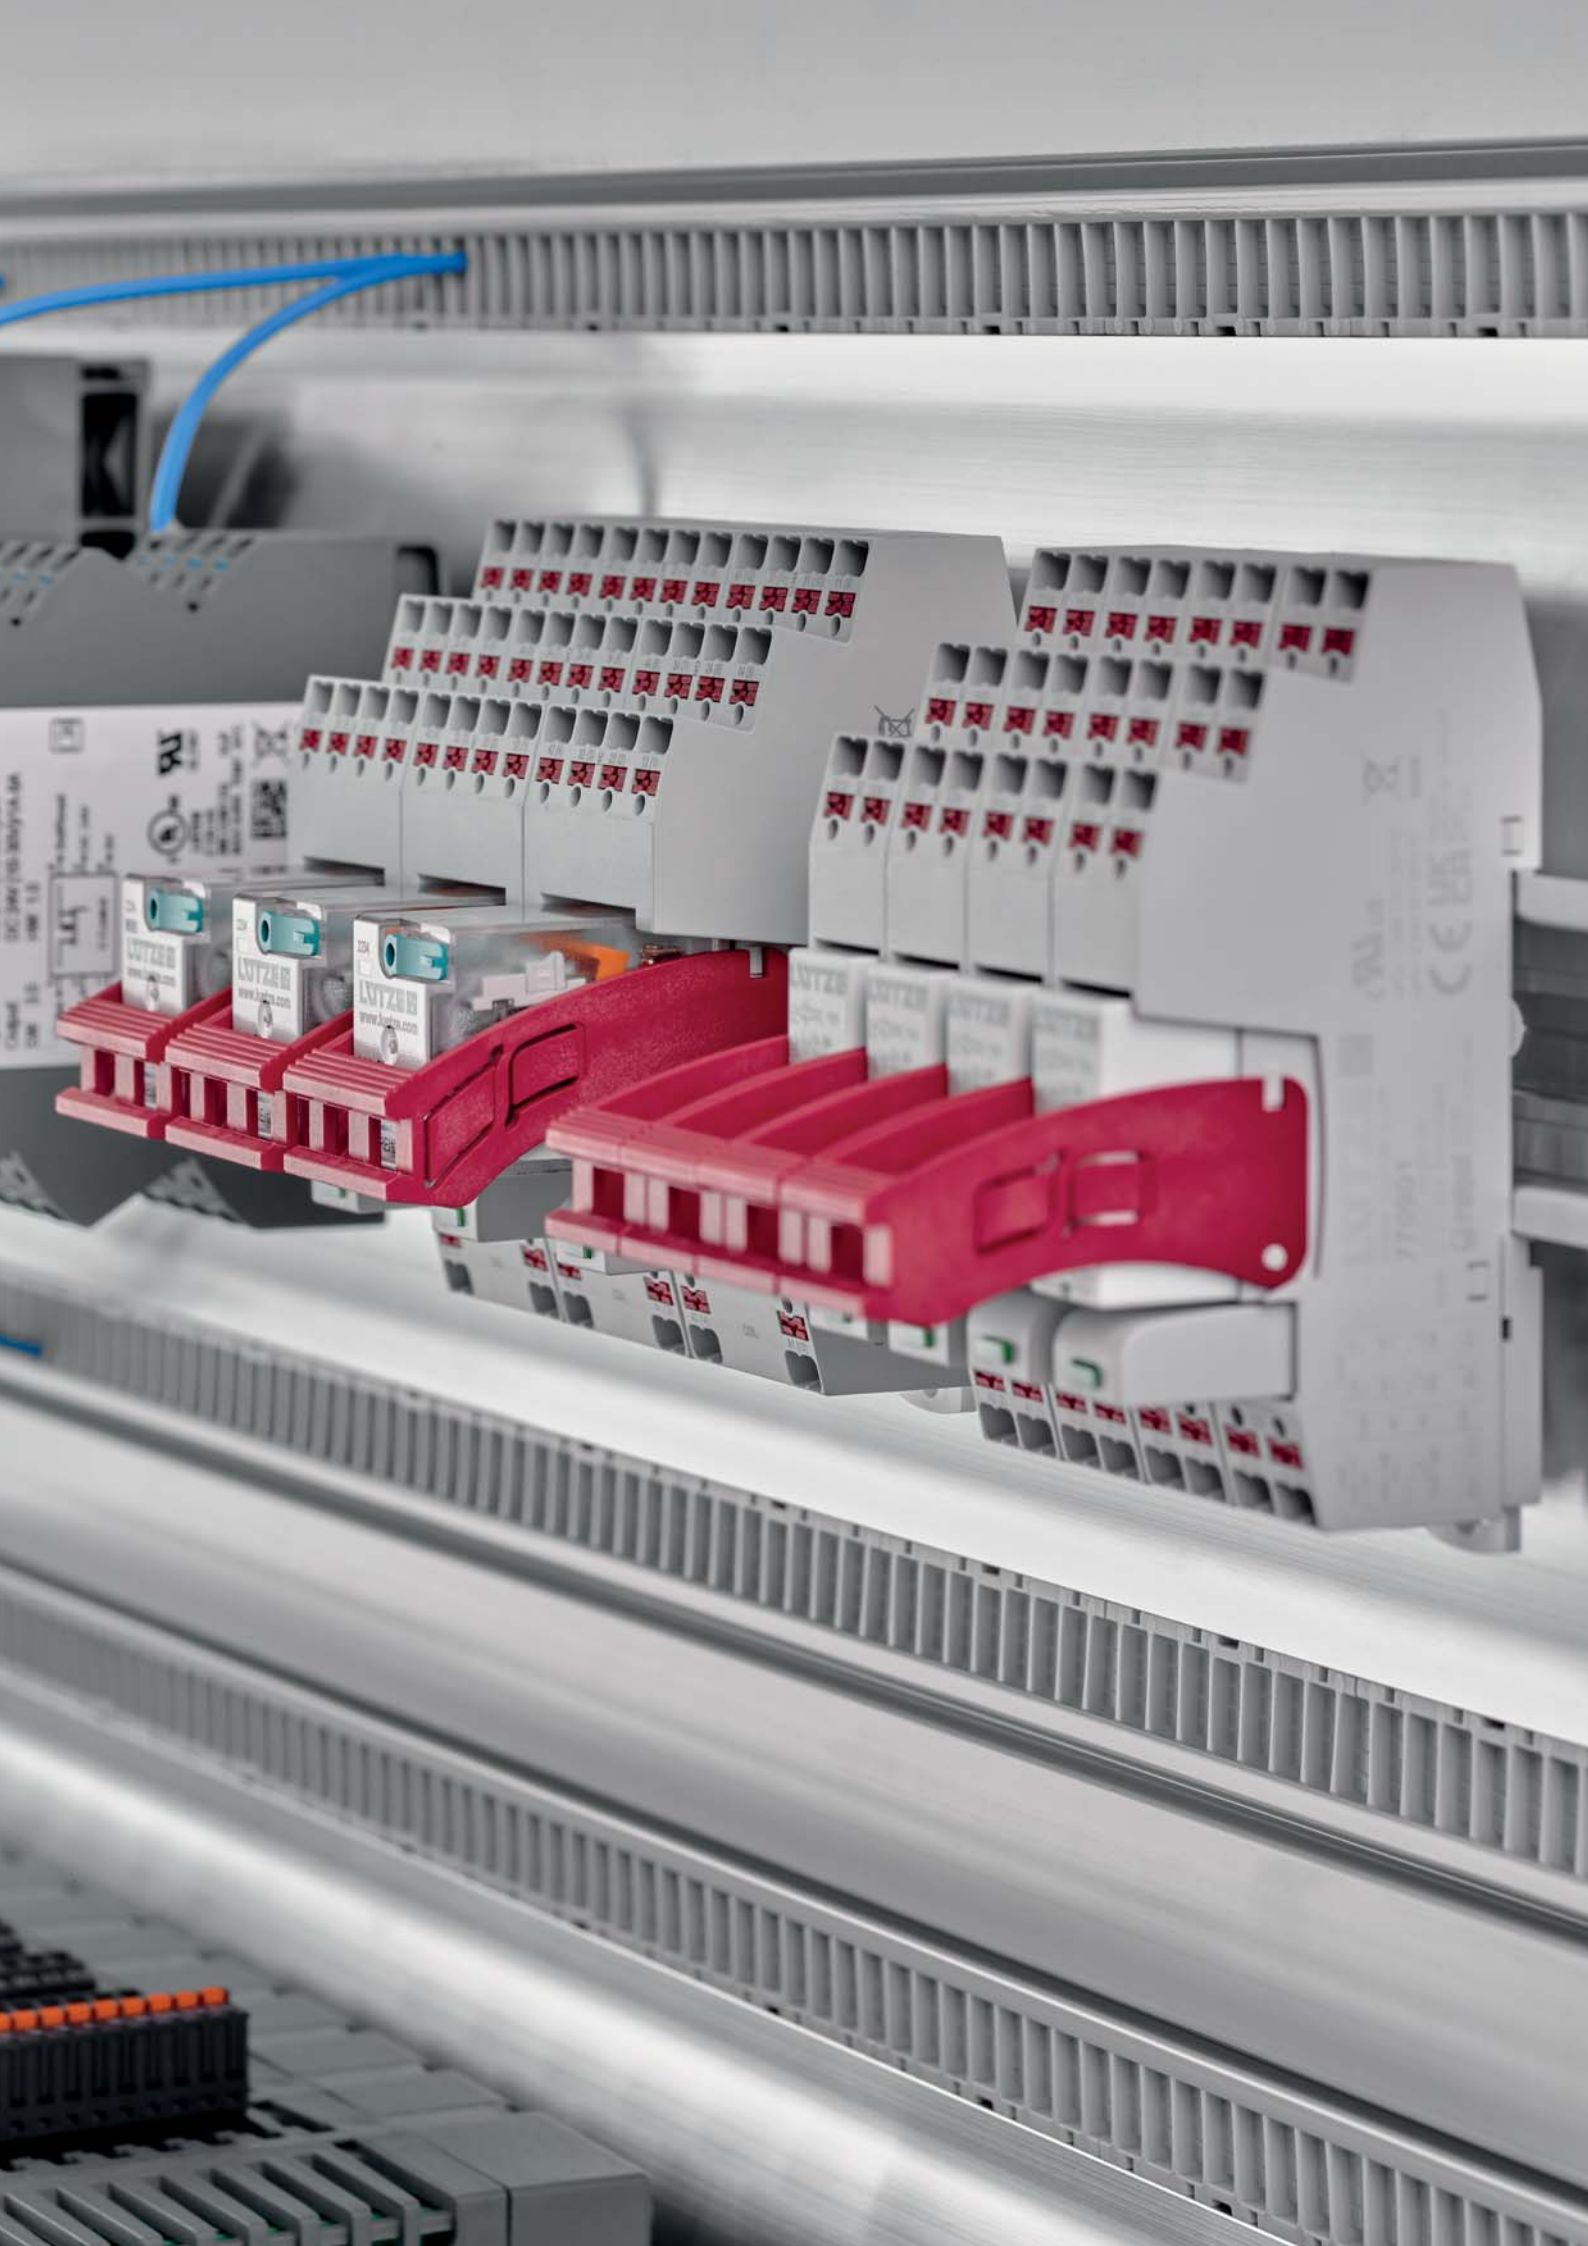

Interface Technology • Product Overview

LCIS relays and solid state relays



Output relay, 1 changeover contact / SPDT, pluggable, $AgSnO_2$

Page 28/29



Output relay, 1 changeover contact / SPDT, pluggable, $AgSnO_2$ + 5 µm HV

Page 30



Output relay, 1 changeover contact / SPDT, $AgSnO_2$

Page 31/32



Output relay, 1 changeover contact / SPDT, $AgSnO_2$, + 5 µm HV

Page 33



Input-relay, 1 changeover contact / SPDT, $AgSnO_2$

Page 34



Input-relay, 1 changeover contact / SPDT, $AgSnO_2$, + 5 µm HV

Page 35



Solid state relay, 2-conductor technology

Page 36-41



Solid state relay, 2-conductor technology, pluggable

Page 42-44



Solid state relay, 3-conductor technology

Page 45-47



Solid state relay, 3-conductor technology, automatic manual-off

Page 48



Replacement relay, 1 changeover contact / SPDT

Page 49



Labeling system

Page 50



Insulated jumper combs

Page 51

LCIS 2/ 3 - Relays



Pluggable AC-Relay-Interface, 1 CO contact

Page 53



Pluggable AC-Relay-Interface, 2 CO contact

Page 54



Pluggable AC-Relay-Interface, 4 CO contact

Page 55



Pluggable relay socket for mini relay

Page 56



Pluggable Relay socket for industrial relay

Page 57



Holding bracket for LCIS2/3 relay socket

Page 58



Pluggable LCIS2/3 DC 6 – 24 V protection modules

Page 59




Pluggable LCIS2/3 AC/DC 115 – 230 V protection

Page 60



Insulated jumper combs for LCIS Relays

Page 61



Labeling system

Page 62

Compact, simple, function al and innovative:
LCIS: LÜTZE Compact Interfa ce Solutions


Compact
With the very low housing depth of just 71mm, LCIS devices can be used in low depth control cabinets and enclosures.

Device coding
Each device can be individuality labeled between 15 to 24 characters, depending on label type.

Terminal point coding
All individual termination markings are clearly visible for ease of accuracy and for simplified wiring.

Simplified installation
Features like isolated jumper connections and multiple number of pole options simplify installation.

Environmental conditions
Temperature ratings ranging between -40° to +85°C and flammability approvals like UL94 V0 and NFF I2/F2 provide installation options for harsh environments.

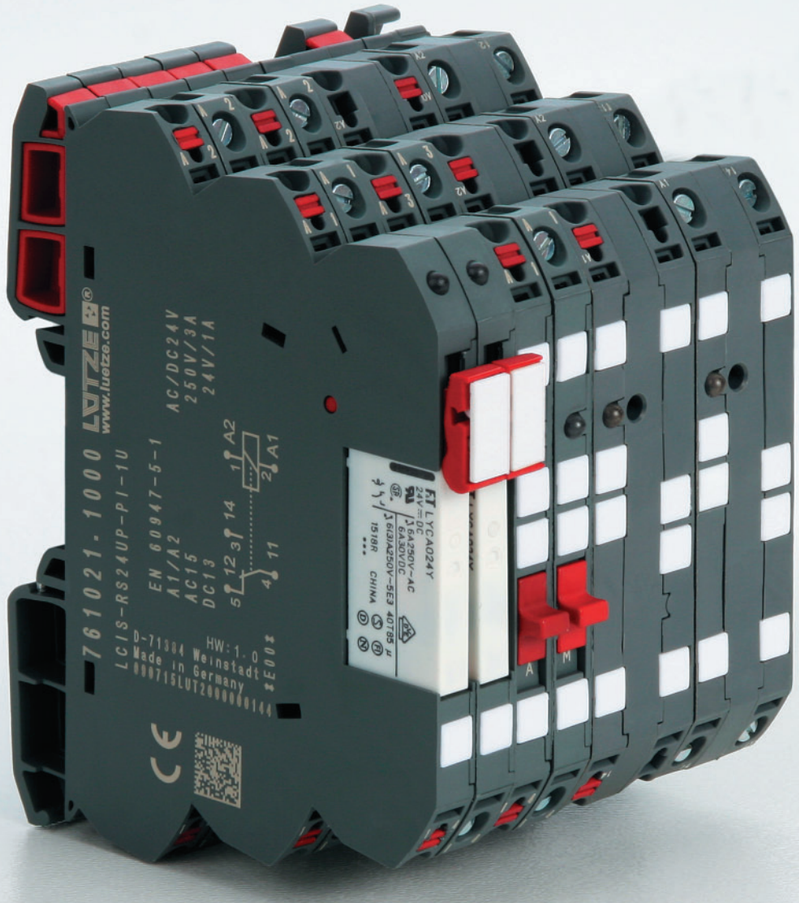

Universal connection technology
Available in two options: push-in or screw termination.

Universal Mounting
The innovative symmetrical housing design and mounting clip allow for an input or output configuration in the same unit.

Labeling
The laser printer label design provides a clean, permanent professional marking appearance.





Push-In test socket
A 2mm Push-In test socket on all units provides a quick and convenient method for testing equipment measurements.

Product Range and Beyond
Our mechanical and solid state relays offer isolation voltage ranges up to 4kV. Features which are possible with LCIS!

Approvals
Worldwide approvals like UL and DNV allow for use in global applications.

Relays - Terminology

Coil (also referred to as exciter coil)

Monostable Relays		Bistable relay with 1 coil	Bistable relay with 2 coils	
non-polarized	polarized		4 connections	3 connections
				

1. Switching characteristic
Black coils represent the excited state. In schematic drawings, the coil polarity for bistable relays is generally specified for the reset state. This applies to both coils.

2. Coil nominal voltage
This is the voltage provided to excite the coil, due to the design.

3. Rated operating current
This is the current that flows through the coil at nominal voltage.

4. Rated operating power
This is the power consumed in the coil at nominal voltage. In case of direct current, this value is indicated in watts; for alternating current, it is indicated in volt-amperes. Rated power (W or VA) = rated current x nominal voltage.

5. Coil resistance
This is the coil's resistance in the direct current relay at the temperature indicated in the catalogue. (Please note that the coil resistance for some relays deviates from the normal ambient temperature of 20°C.)

6. Response voltage
This is the voltage at which all contacts switch to their active operating state.

7. Drop-out voltage
This is the voltage at which all contacts return to their idle state.


8. Maximum continuous voltage
This is the voltage that can be constantly applied to the coil without causing any damage. Short-term spikes of a higher voltage can be permitted.

Contacts

1. Contact types

The contact type identifies the contact mechanism.

2. Contact symbols



Form A contacts are also called N.O. (normally open) contacts, make contacts or closed-circuit contacts. Form B contacts are also called N.C. (normally closed) contacts, break contacts or open-circuit contacts. Form C contacts are also called changeover contacts or switch contacts.

3. MBB contacts

Abbreviation for uninterrupted switch contacts or series switch contacts (MBB = make before break). This is a contact mechanism in which the make contacts close before the break contacts open.

4. Rated switching capacity

The rated switching capacity is the power in watts (direct current) or volt-amperes (alternating current) which, depending on design, can be safely switched from the contacts. Its value results from multiplying the switching voltage by the switching current and is less than the product of maximum voltage and maximum current.

5. Maximum switching voltage

The max. switching voltage is the highest voltage that can be safely switched from the contacts. In most cases, the value differs for direct current and alternating current.

6. Maximum switching current

The maximum switching current is the highest current level that can be safely switched from the contacts. Maximum alternating current and maximum direct current can differ from one another.


7. Max. switching capacity

The maximum switching capacity is the highest power level that can be switched from the contacts. The maximum switching capacity should not be exceeded.

8. Maximum switching capacity

The maximum switching capacity is indicated as the maximum value of contact capacity for each relay and represents a correlation between the maximum switching capacity, the maximum switching voltage and the maximum switching current. The switching current and switching voltage are indicated in a diagram. If, for example, the switching voltage is defined in a specific application, the maximum switching current can be found on the axis through the maximum switching capacity.

Maximum switching capacity

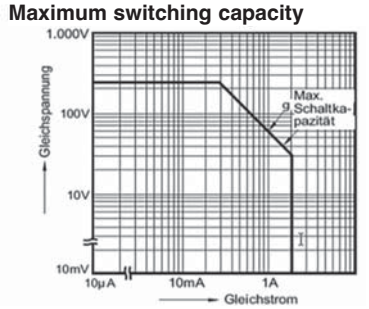

Example: when using a relay with a switching voltage of 60 V DC, the maximum switching current amounts to 1 A. (The maximum switching capacity is indicated as ohm resistive load. Check the momentary load prior to use.)

9. Minimum switching capacity


The minimum switching capacity refers to the minimum values of voltage and current that can reliably be switched from the contacts. These values are different depending on the relay type. These minimum values are influenced by the switching frequency, the ambient conditions and the contact friction travel. For low-level loads or a contact resistance of max. 100 mΩ, contact our authorized personnel.

10. Contact resistance

Is indicated as total resistance from the resistance of the contacts and the resistance of the connections and contact springs. The contact resistance is measured using the voltage drop method set out below.

Relays - Terminology

The measurement currents are shown.



Measuremen currents

Nominal contact current or switching current (A)	Measurment current (mA)
< 0,01	1
0,01 - 0,1	10
0,1 - 1	100
> 1	1.000

Relays are generally measured as from a switching current of 1A using the voltage drop method at 1A, 6V DC.

11. Maximum continuous current

The maximum continuous current is the current which can be safely carried after the contacts close or before they open without causing an impermissible temperature rise in the contacts or other temperature-sensitive components in the relay (coil, springs, insulation, etc.).
Its value is normally above the maximum switching current.

12. Contact capacity

This value is measured between the terminals with a measurement current of 1kHz and 20C.

Relays characteristic data

1. Insulation resistance


The insulation resistance is measured between mutually insulated conductive components of the relay: between open contacts and between the coil or contacts against the magnetic circuit or base body with earth potential. This value is normally termed "initial insulation resistance", and may decrease over time due to ageing or deposits of contact burn-off.
- Between coil and contacts
- Between open contacts
- Between contact sets
- Between exciter coil and reset coil

2. Voltage resistance

Voltage which can be connected to the relay without voltage breakdown for a certain time is normally measured at the same points as the insulation resistance. The specified value in Veff is applied for one minute.


3. Surge voltage resistance

Capacity of the relay to resist an external surge voltage, such as a lightning strike or other phenomenon. For test purposes a characteristic curve is applied in which the rise time, the peak value and the reset time are defined.

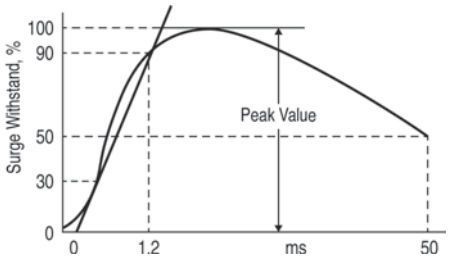

4. Set time

Time from the start of excitation of the coil until the working contact of form A closes. (In the case of multi-contact relays it is the time until the last contact closes.) The set time contains no bounce time.

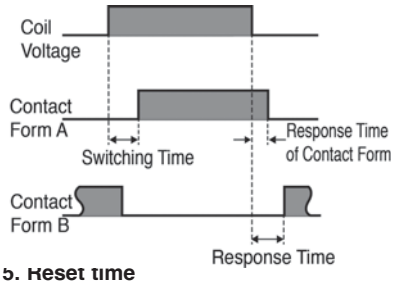

5. Reset time

Time from the end of excitation until a normally-open contact of form B closes again. (In the case of multi-contact relays it is the time until the last contact closes again.)
The reset time contains no bounce time.

6. Contact bounce

Contact bounce is given in milliseconds. The bounce time produces an intermittent contact release resulting from the collision of the moving contacts during setting or resetting.

Mechanical properties and service life

1. Impact resistance

1) Functional

Acceleration which the relay resists during operation without the closed contacts opening for longer than the specified time (mostly 10 s).

2) Destructive

Acceleration which the relay is able to resist during shipping or installation without damage and without altering its characteristic data. The impact resistance is given in "g". The test was performed a total of 18 times - six times in each of the three axis directions.


2. Vibration resistance

1) Functional

Vibration which the relay resists during operation without closed contacts opening for longer than the specified time.

2) Destructive

Vibration which the relay resists during shipping, installation or use without damage and without altering its characteristic data. The vibration resistance is given as acceleration in "g" or as displacement with a specific frequency range. The test was performed for a total of six hours; two hours for each of the three axis directions.



Relays - Terminology

3. Mechanical service life

Minimum number of operations for which the relay can be operated under nominal conditions (coil voltage, temperature, humidity, etc.) without placing load on the contacts.

4. Electrical service life

Minimum number of operations of the relay under nominal conditions at the specified contact load.


5. Maximum switching frequency

Highest possible switching frequency at which the mechanical or electrical service life can be attained under nominal excitation of the coil.

6. Life curve

The life curve is given for each relay type in the Data column. The service life (number of operations) is dependent on the switching voltage and switching current.
For a DC relay with the following data: switching voltage = AC 125 V and switching current = 0.6 A the service life is 300,000 switching cycles. This value relates to the ohmic load. Check the momentary load prior to use.

Life curve

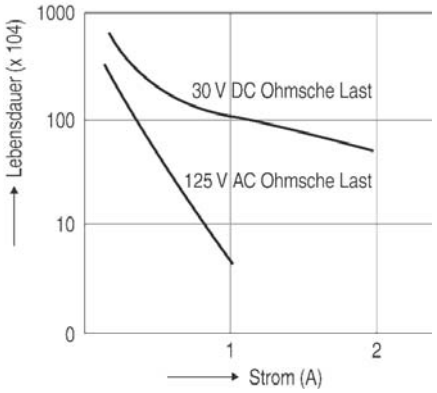

Mathods for selecting the correct relay

Methods for selecting the correct relay

For proper operation of the relay it is essential to know the properties and application conditions of the selected relay in detail in order to match it to the specified ambient conditions.
The coil and contact properties of the relay used must be precisely matched to the prevailing ambient conditions. The table below summarises the key points in relay selection.

It can be used as a reference in searching for the repair instructions product under the specified conditions.

	Rules	Product selection
Coil	a) Rating b) Pick-up voltage (current) c) Drop-out voltage (current) d) max. continuous voltage (current) e) Coil voltage f) Impedance g) Temperature rise	1) Take into account the ripple of the exciter voltage. 2) Take into account the ambient temperature and temperature rise of the coil 3) If the relay is operated in conjunction with semiconductors, the associated circuit must also be considered. Take care to avoid voltage drops on power-up.
Contacts	a) Contact arrangement b) Contact load c) Contact material d) Service life e) Contact resistance	1) It is advisable to use a product containing more contacts than the essential minimum. 2) Relays must provide the service life expected in the specific application case at hand. 3) Does the contact material match the load type? This is particularly necessary in relation to minimum values. 4) The service life may be shortened in operation at high temperatures. It should be tested for the specific environment. 5) Depending on the circuit, the relay actuation may be synchronised by the alternating current load. As this dramatically reduces the service life, the application case at hand should be checked.
Switching time	a) Switching time b) Set time c) Reset time d) Switching frequency	
Mech. properties	a) Vibration resistance b) Impact resistance c) Ambient temperature d) Service life	1) Take into account the vibration and impact load at the operating location. 2) Particularly at high temperatures, a relay with coil insulation of class B or F may be required.
Additional aspects	a) Voltage resistance b) Mounting method c) Size d) Protection types	1) For operation in aggressive atmospheres sealed relays should be selected. 2) Do special conditions apply?

Relays - Terminology

Basic rules for use of relays

- Avoid subjecting the relay to shock impact.
- Relay housings should not be removed. The values might be changed as a result. That is to say, the data sheet specifications apply only to the complete relay.
- Relays should wherever possible be operated in an environment of normal temperature and humidity, with little dust, and free of SO_2, H_2S or organic gases. For operation in aggressive atmospheres sealed relays should be selected. Silicone residues close to the relay may cause contact failures. (This also applies to plastic-sealed relays.)
- In the case of polarised relays, ensure that the correct polarity (+/–) is connected to the coil.
- For correct application the nominal voltage should be applied to the coil. Use square waves for DC coils and sine waves for AC coils.
- The coil voltage should not exceed the permissible maximum.
- The switching load and service life specifications are merely guide values. The physical phenomena in switching, and thus the service life, depend heavily on the type of load and the other operating conditions. So you should check all parameters prior to use.
- Do not operate the relay at temperatures above those specified on the data sheet.
- Use flux-tight or sealed washable relays for automatic soldering.
- Use alcohol-based cleaning products to clean the sealed relays. Avoid ultrasound cleaning of all kinds of relays.

Precautions at the relay coil input

The applied nominal voltage is key to correct operation of the relay. The relay will work if the applied voltage is above the pick-up voltage, but it is necessary to apply only the specified nominal voltage to the coil to avoid changes in coil resistance which might occur due to differing current feed, voltage fluctuations and temperature rise. Care should also be taken because problems such as winding shorts and coil burn-off can occur when the maximum applied continuous voltage is exceeded. The following section sets out precautions for the coil input. Observe these instructions in order to avoid problems.

1. Basic rules relating to the relay coil

• AC relays

AC relays are almost always operated on a voltage source with a frequency of 50 or 60 Hz and standard voltages of 6, 12, 24, 48, 115, 120, 230 and 240 V. So those standard voltages should be used wherever possible. Losses also occur in AC coils due to short circuit rings, eddy current and hysteresis losses. Furthermore, the coil efficiency is reduced, resulting in greater coil heat-up than in the case of DC relays. Also, relays start to hum even at voltages below the minimum operating voltages. It must be ensured that the output voltage from the voltage source does not fluctuate excessively. Voltage drops may occur when actuating a motor for example. If a relay hums, and as a result is returned to its initial state, the contacts may be damaged. AC relays need a higher operating current than that specified to power-up because the inductance - and thus the impedance - is lower when the relay armature is open than when the armature is connected. This must be considered especially when multiple relays are operated in parallel.

• DC relays

To operate DC relays there are standard voltages: DC 5, 6, 12, 24,48 and 100 V. The catalogue specifies the setting current. That current is just about enough, however, to move the relay armature. Taking into account resistance tolerances and increased coil resistance due to temperature, between 1.5 and 2 times the value of the setting voltage should be selected as the operating voltage.

If relays are operated at the upper limit of their capacity, fluctuations in the injected coil current will occur, and the contact movement may be delayed. This poses a risk that the specified switching capacities will not be reached. These aspects should be carefully considered. The coil resistance is increased by a factor of 0.4%/C both in the event of internal heat-up and if the ambient temperature increases. The setting and resetting voltage is increased by the same factor. (For some polarised relays this rate of change is much less however.)

2. Maximum continuous voltage and rise in coil temperature

In correct application, the relays must be operated at nominal voltage. Note that a coil voltage greater than the permitted maximum may result in excessive coil heating, leading to winding short and ultimately causing burn-off of the coil. Do not operate the relay at temperatures above those specified on the data sheet.


• Maximum continuous voltage

In correct application, the relays must be operated at nominal voltage. Note that a coil voltage greater than the permitted maximum may result in excessive coil heating, leading to winding short and ultimately causing burn-off of the coil.

• Temperature rise in pulsed operation

In the case of voltage pulses shorter than 2 minutes, the coil heat-up depends not only on the time but also on the duty cycle. It is relatively low compared to the heat-up in continuous operation. The various relays are essentially identical in this respect.

Duty cycle	%
Continuous operation	100 % coil heat-up
ON : OFF = 3 : 1	approx. 80 %
ON : OFF = 1 : 1	approx. 50 %
ON : OFF = 1 : 3	approx. 35 %

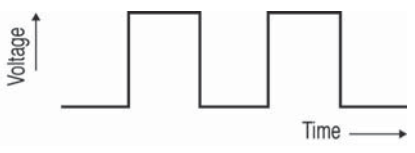

Relays - Terminology

· Change in pick-up voltage due to rise in coil temperature (warm start)

After a certain constant voltage in the coil followed by switching the current off and back on, the pick-up voltage of DC relays increases slightly in line with the temperature rise. This is comparable to operation in a higher ambient temperature. The ratio between the increases in resistance and temperature for copper wire is approximately 0.4% per 1C. The coil resistance is increased by that ratio.
For operation of the relay it is therefore necessary for the voltage to be higher than the pick-up voltage, and that the pick-up voltage rises in line with the insulation resistance. For some polarised relays that rate of change is much lower however.

3. Applied coil voltage and switching time


In AC operation the set time is heavily dependent on the momentary phase angle at which the coil is being excited. For miniature relays it is in most cases one half-wave. For the larger relay it is 7 to 16 ms; the reset time is 9 to 18 ms.The set time for large coils is too fast in DC operation too. However, an excessively fast operating time will also increase the bounce time of contact "A".


Note that the load conditions (particularly in case of heavy inrush current or under a load close to rated load) may result in reduced service life and minor fusing.


4. Stray circuits

(Shunts) In follow-up circuits it must be ensured that no shunts are created, so as to avoid false or irregular operations. As shown in the following diagram, two terminals must be provided as power supply to prepare for follow-up circuits; the top terminal is always "+" and the bottom "–". (The same applies in AC operation).– So the "+" side is always the side on which contact circuits (contacts for relays, timers, limit switches, etc.) are constructed and the "–" side is the load side (for relay coil, timer coil, solenoid, cylinder coil, motor, lamp, etc.).

The next diagram illustrates stray circuits. The closed contacts A, B and C, after operation of relays R1, R2 and R3. If contacts B and C are open, a follow-up circuit is created by A, R1, R2 and R3, and the relays may hum or they may be prevented from dropping out. The circuit (b) is correctly executed. In DC operation stray circuits can be avoided by using an isolating diode.

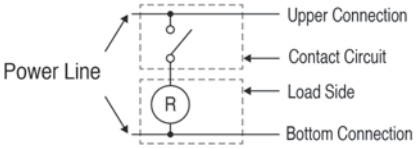







5. Phase synchronisation when switching AC loads

If the relay always switches at the same phase angle due to feedback from the load to the actuation, this may shorten the electrical life and cause fusing or locking of the contacts as a result of material migration. So the relay should be observed on the basis of the specific application case. When operating relays with timers, microcomputers or thyristors etc., there may be synchronisation with the power supply.

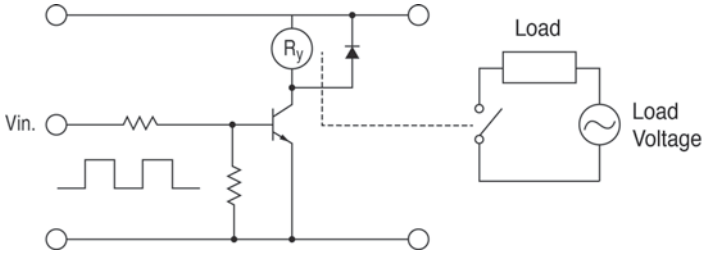

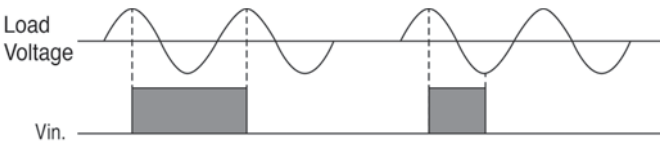

6. False switching due to inductive coupling

In the case of long lines: If the load and control feeds use the same electrical cable, the induction from the current line may produce an induction voltage on the coil. It is irrelevant whether the control signal is on or off. In this case relays and timers are not reset. Note that cables covering long stretches may suffer false relay switching due to problems in capacity distribution. External influences such as lightning strikes etc. may also cause equipment failure.

Relays - Terminology

7. Long-term current flow

In applications involving long operations (such as emergency lights, anti-theft security systems and test mechanisms) it is advisable to preferentially use normally-open contacts for continuous operation. Continuous and long-term voltage on the coil may impair the coil insulation, and increased coil heat-up may shorten the service life. Bi-stable relays should be used for these applications. If you use a single stable relay, you should select a plastic-sealed variant which is not as responsive to ambient conditions, and a more fail-safe circuit arrangement.


8. Rare switching operations

If a switch is executed only once a month, or even less, you should carry out regular contact testing. If the contacts are not switched for a lengthy period of time, deposits may form on the surface, leading to instability of the contacts.


9. Electrolytic corrosion of the coils

When using relays with comparatively high coil voltage, electrolytic corrosion may occur, especially in conditions of high humidity. To avoid open circuits, you should pay particular attention to the following points.

- The "+" side of the voltage source should be connected to the base plate. (See Fig. a) – This applies to all relays)

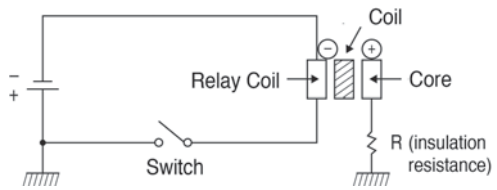


- Where earthing of the "+" side is unavoidable, or where earthing is not possible: Set the contacts (or the switch) on the "+" side of the voltage source. (See Fig. b – This applies to all relays)

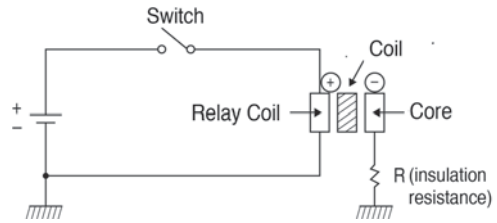


b) Evaluation: ok

- If earthing is not required, connect the earth connection to the "-" side of the coil. (See Fig. c – LF and R relay with earth connection)

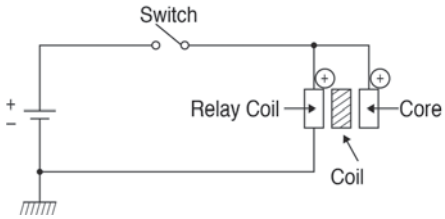

c) Evaluation: ok

- If the "-" side of the voltage source is earthed, avoid using the contacts (and switches) on the "+" side. (See Fig. d – This applies to all relays)
- If the relay has an earth connection which is not needed for operation, it should not be connected, so as to prevent electrolytic corrosion.

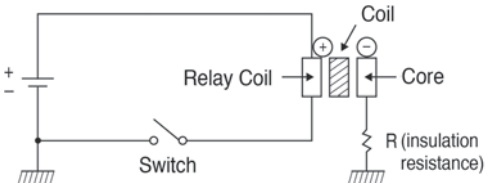

Note: The diagram shows that the insulation resistor has been inserted between the iron core and chassis earth. In a relay with earth connection the iron core could be earthed directly on the chassis.

Precautions on the contact

- **Contacts**

The contacts are the most important components of the relay. The performance capability of the contact is dictated primarily by the contact material, the switching voltage and current (particularly at the point of switching on and off), the type of load, the switching frequency, the ambient atmosphere, the contact form, the switching speed and the contact bounce. The following points should be considered in order to avoid material migration, contact fusing, excessive burn-off, increased contact resistance and various other causes of failure: *It is advisable to clarify the usage in advance with our sales offices.

Relays - Terminology

Basic rules relating to the relay contact

· AC/DC

If the load contains an inductive component, a quite high counter-EMF (induction voltage) will be generated which increases the switch-off voltage. The energy discharged on the contacts causes burn-off and material migration. So it is not necessary to suppress the arc by means of a suitable RC element. With direct voltage there is no zero crossing where the arc self-extinguishes. Once an arc has been generated, it is difficult to suppress. The extended arc dwell time poses the main problem for the contacts. Also, the direction of the current is pre-determined, resulting in increased material migration (on one side). The approximate value of the RC element is usually specified in the catalogue or data sheet, but that value alone is mostly not sufficient. Customers will create a circuitry configuration best suited to their specific application case.

For inductive loads it is generally advisable to use relays suitable for switching 125 VAC. The catalogue specifies the minimum loads, though they only apply as a guideline for the switching capacity of the relay and do not represent exact values. These minimum values are influenced by the switching frequency, the ambient conditions and the contact friction travel.

· Switching current

The current is a key influencing factor in both the closing and opening of the contacts. If a motor or lamp is switched as the load for example, the higher inrush current causes a correspondingly greater burn-off and material migration.
So after a while a contact response or fusing occurs.

Properties of commonly used contact materials

Kontaktmaterial	Typical properties	Typical applications	Guide values for application field
Ag (silver)	The electrical and thermal conductivity of silver is higher than that of any other material. Silver has a low contact resistance and is cheap and widely available. A disadvantage is that silver readily forms sulphide film in sulphide atmosphere. Care needs to be taken at low voltage and current.	Universally usable under medium load as an alloy with nickel (AgNi0,15) Usable for DC circuits with medium to high load	≥ 12 V ≥ 10 mA
$AgSnO_2$ (silver/tin)	The resistance to fusing of silver/tin is even better than silver/cadmium. As in the case of silver, a sulphide film forms in sulphide atmosphere.	Application heavily dependent on relay type Usable for high switch-on and switch-off loads	≥ 12 V ≥ 100 mA
AgW (silver/tungsten)	The hardness and melting point of silver/tungsten are high, its resistance to arcing is excellent, and the material migration extremely low. A high contact pressure is required however. The contact resistance is relatively high and the resistance to corrosion poor.	Specially for loads with very high inrush currents e.g. in building lighting applications	≥ 60 V ≥ 1000 mA
AgNi (silver/nickel)	Silver/nickel has a similar electrical conductivity to silver. It has arc-extinguishing properties.	Usable for DC circuits with medium to high load, inductive loads	≥ 12 V ≥ 10 mA
Contact surface	**Typical properties**	**Typical applications**	**Guide values for application field**
Au coating (gilding)	Gilding has a similar effect to gold plating. Depending on the galvanisation method employed, it is very important to monitor the process, because there is a risk of pores and cracks forming. The use of gilded contacts in existing relays is relatively simple.	For low loads only	µV bis 30 V µA bis 200 mA
Gold-flashing (application of a thin gold layer)	The purpose of gilding is to protect the contact base material during storage of the relays or of the device in which the relay is installed. A degree of contact stability can be attained in load switching however.	Purely in-storage protection	


Relays - Terminology

Contact protection

· Self-induction voltage

When switching inductive loads with a relay, such as in relay sequence circuits, DC motors, DC clutches and DC solenoids, it is always important to absorb surge voltages (e.g. with a diode) so as to protect the contacts. If those inductive loads are switched off, a self-induction voltage of several hundred to thousand Volts develops which may seriously damage the contacts and severely shorten service life.

If the current in those loads is relatively low, and around 1 A, the self-induction voltage may cause ignition of a glow or arc discharge. During discharging organic material in the air decomposes and produces black residues (oxides, carbides) which are deposited on the contacts. This may result in contact failure.
In Figure (a) a self-induction voltage (e = –L di/dt) with a steep wave form above the coil has been generated, with the polarity shown in Figure (b) being switched off at the point the inductive load is applied.

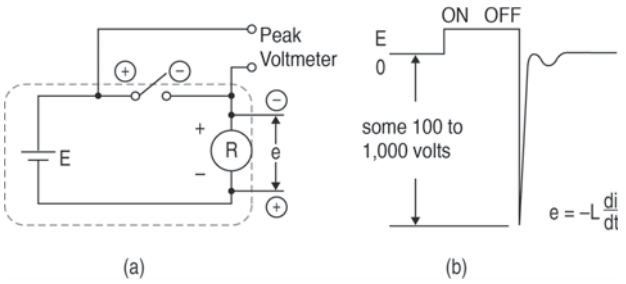


The self-induction voltage is carried through the power supply cable and reaches the two contacts. The electrical ignition voltage at standard temperature and air pressure is generally approximately 200 to 300 Volts. If the self-induction voltage exceeds this value, a discharge takes place on the contacts which consumes the energy stored in the coil (1/2Li2). For this reason it is desirable to absorb the self-induction voltage, so that it is a maximum of 200 V.

· Material migration phenomenon

Material migration on contacts takes place when a contact melts and the contact material transfers to other contacts. As the number of switching operations increases, uneven contact surfaces develop. After a certain time, the uneven contacts are solidly joined together as if they were fused. This happens, for example, when discharges occur due to inductive or capacitive loads. As a countermeasure, contact circuits and materials resistant to material migration are used, such as $AgSnO_2$, AgW or AgCu. Generally a concave form appears on the cathode and a convex form on the anode.




For DC capacitive loads (several Amperes up to several tens of Amperes) it is always necessary to perform confirmation tests under real conditions.

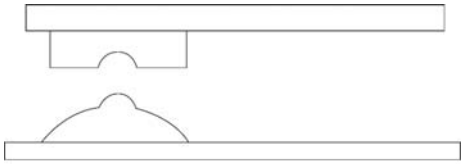



Material migration on contacts

· Contact protection circuit


Induction voltages can be reduced by contact protection circuits. Note, however, that incorrect application may have the opposite effect. The following table sets out typical circuits of this kind.

	Circuit	Use AC	Use DC	Properties/Other	Component selection
RC circuit		X*	X	If the load is a timer element, the stray current flows through the RC circuit and causes misoperation.* In an application with alternating voltage make sure the impedance of the load is sufficiently smaller than the RC circuit.	As a guideline in selecting r and c: c: 0.5 to 1µF per 1A switching current; r: 0.5 to 1 Ω per 1V switching voltage. The values are dependent on the load and the variations in the relay properties. The capacitor C suppresses the discharge on contact opening. The resistor limits the current on the next switching operation. Please perform confirmation tests. Use a capacitor with a voltage resistance (dielectric strength) of 200 to 300 V. For AC circuits you need an unpolarised AC capacitor.
		X	X	If the load is a relay or solenoid, the reset time is extended. The circuit is effective if connected to both contacts as soon as the supply voltage is 24 or 48 V and the voltage via the load is 100 to 200V.	
Diode circuits		-	X	The diode switched on in the reverse direction parallel to the load shorts the self-induction voltage created when the contacts open. In the process the energy stored in the inductive load is converted into heat in the ohmic component of the inductor. This circuit further extends the reset time compared to the RC circuit (two to five times the reset time specified in the catalogue).	Use a diode with a breakdown voltage in reverse direction corresponding to at least ten times the switching voltage. In electronic circuits in which the voltage is not so high, a diode with a breakdown voltage in reverse direction of approximately two to three times the switching voltage can be used.


Relays - Terminology

Circuit		Use		Properties/Other	Component selection
		AC	DC		
Diode circuits		-	X	The circuit is effective when the reset time in the diode circuit is too long.	Please use a Zener diode with a Zener voltage roughly matching the switching voltage.
Varistor circuit		X	X	Using the constant voltage properties of the varistor, this circuit prevents particularly high voltages over the contacts. This circuit also slightly extends the reset time. The circuit is effective when connected to both contacts as soon as the switching voltage via the load is 100 to 200V.	

• Avoid using the protective circuits shown in the diagrams on the right. As inductive DC loads are more difficult to switch than ohmic loads, use of a protective circuit is recommended.



Although they are extremely effective in arc suppression when contacts open, the contacts are subject to fusing, as energy is stored in C which causes a short when the contacts close.



Although they are extremely effective in arc suppression when contacts open, the contacts are subject to fusing, as energy is stored in C which causes a short when the contacts close.

• Mounting the protective device

In the circuit it is necessary to locate the protective device (diode, resistor, capacitor, varistor, etc.) in the immediate vicinity of the load or the contact. If the protective device is too far away, its efficiency may decrease. As a guideline, a distance up to 50 cm should be applied.


• Anomalous corrosion during high-frequency switching of DC loads (sparking)

If a DC valve or clutch, for example, is switched at high frequency, corrosion may develop. It is produced by reaction with the nitrogen in the air when a discharge occurs during switching. So care must be taken if discharges at high


Precautions when switching inductive loads

• Switching of load and contacts

Switch the load on one side of the power feed - see following Figure a) - and switch the contacts on the other side. This will prevent high voltages occurring between the contacts. If the contacts are switched on both sides of the power feed - Figure b) - there is a risk of short-circuit in the event of flash-over when contacts are located very close together for design reasons.

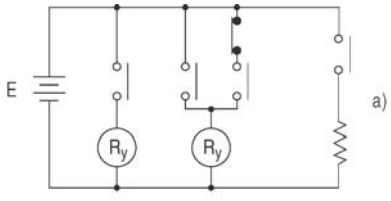

a) Good example

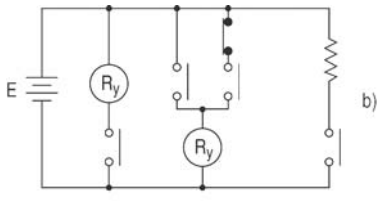

b) Bad example

Relays - Terminology

· Impedance


As the voltage level on contacts used in low current circuits (dry circuits) is low, this frequently results in low conductivity. Stability can be improved by adding an impedance parallel to the load so as to purposely increase the load current applied to the contacts.

· Avoidance of short-circuits between working and normally-open contacts


1) In compact devices the distance between the contacts of form A and B may be small. The occurrence of short-circuits due to flash-over must be assumed.

2) Even if the three N.C., N.O. and COM contacts are configured so that they can short, no possibility of blow-out may exist.


3) Circuits to reverse the direction of rotation of motors must not be constructed with normally-open contacts and working contacts of the same contact set.

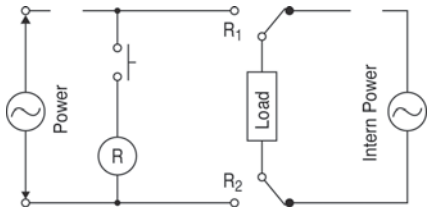

1) R1, R2: Relay contacts
R: Relay with 2 switches



2)

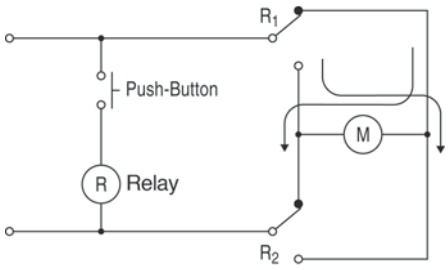

3) R1, R2: Relay contacts
R: Relay with 2 switches

· Short-circuits between contact sets

Although there is a clear trend towards the miniaturisation of electronic circuits, special attention must be paid to selection of suitable relay types. This applies in particular to multiple relays between which different voltages are switched. This problem is not detectable from diagrams for follow-up circuits. Instead, the entire design of the device must be investigated and adequate safety reserves must be ensured in terms of creepages and clearances, voltage resistance, contact pitch, etc.


· Load type and inrush current

The load type and inrush current, together with the switching frequency, are key factors in terms of contact life. Particularly in the case of loads with inrush currents, the continuous current and the inrush current should be measured. Select a relay with an adequate safety factor. The table on the right shows the relationship between typical loads and their inrush currents. Also check the differing momentary polarity according to the specific relay, as the service life depends on the polarity of the COM and NO contacts.

Load type	Inrush current
Ohmic load	Continuous current
Inductive load / solenoid load (e.g. solenoid valves)	10 to 20 times the continuous current
Motor load	5 to 10 times the continuous current
Bulb load	10 to 15 times the continuous current
Mercury lamp load	3 times the continuous current
Sodium-vapour lamp load	1 to 3 times the continuous current
Capacitive load	20 to 40 times the continuous current
Transformer load	5 to 15 times the continuous current

· When using long cables


If long cables (100 to 300 m) are used in a relay contact circuit, the inrush current may cause problems due to the stray capacitance between the cables. So please insert a resistor (approximately 10 to 50 Ω) in series with the contacts.

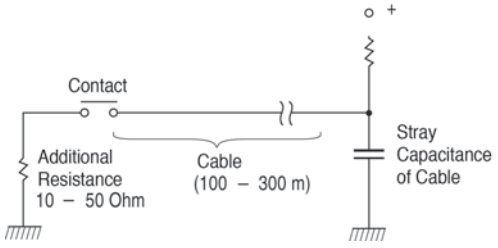


Relays - Terminology

· Phase synchronisation when switching AC loads

If the relay always switches at the same phase angle due to feedback from the load to the actuation, this may shorten the electrical life and cause fusing or locking of the contacts as a result of material migration. So the relay should be observed on the basis of the specific application case. When operating relays with timers, microcomputers or thyristors etc., there may be synchronisation with the power supply.

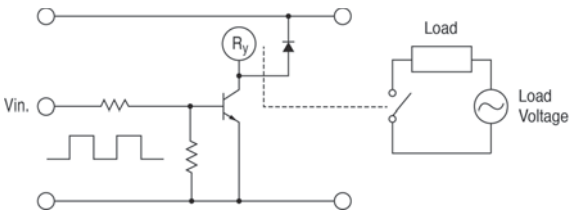

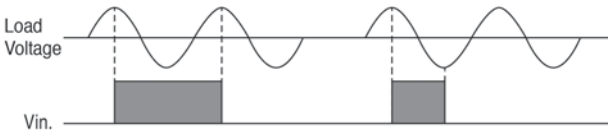

· Service life at high temperatures


Check under the momentary load whether the service life is influenced by use at high temperatures

Notes

Solid State Relays - Terminology

Control side


Semiconductor relays - also known as solid state relays (SSRs) - are an alternative to mechanical relays in many applications. Although these devices belong to the general category of relays, they are actually not relays. They are in fact electronic devices. The basis of a solid state relay is very often an optocoupler with a downstream additional electronic switching element in the form of a transistor, triac or MOSFET.

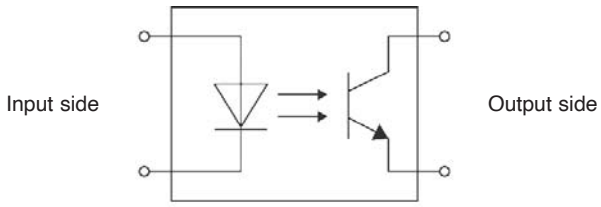

Optical coupler

DC input


Thanks to the LED in the input circuit of the optocoupler, different voltage levels can be adapted to by adding a specially selected electronics unit. To prevent the electronics unit from being destroyed by an incorrectly connected operating voltage, an anti-polarity reversal protective diode is additionally inserted into the control circuit.

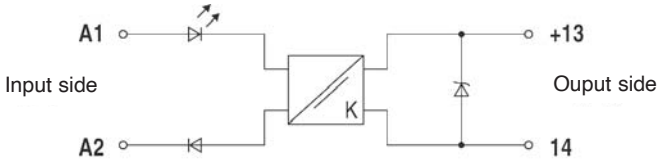

Recerse diode

AC input

Safe operation with an alternating voltage requires an upstream electronics unit to generate a stable control voltage. This is attained by means of a rectifier and a smoothing capacitor. The smoothing capacitor reduces the possible switching frequency to a maximum of half the mains frequency. At higher frequencies the input circuit would continually switch through.

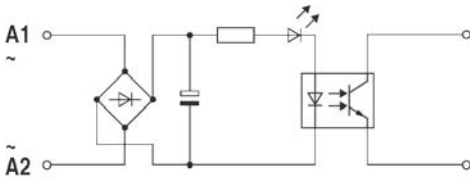

Load side

A wide variety of demands are placed on the output circuit depending on the application case and load type. Decisive factors here are:

– Power amplification

– Adaptation to switching voltage/current (AC/DC)

– Short-circuit protection

Here, too, an upstream electronics unit must be installed.

DC output

To attain the specified output power, the optocoupler output is provided with a power stage. To that end, bipolar transistors or MOSFETs are used in DC operation. That is irrelevant for practical operation, however, as the terminals can still be regarded as conventional switch connections. Only the specified polarity must be observed as a mandatory requirement.

Solid State Relays - Terminology

To select the correct switching output the following criteria should be applied:

1. Operating voltage range

The specified minimum and maximum values must be observed in order to ensure safe function. In order to protect the switching transistor, the upper value must not be exceeded.


2. Maximum continuous current

This value dictates the maximum permissible continuous current. Note in this context that the current is dependent on the ambient temperature. The actual continuous current is derived from the available derating curves. Overranging of the continuous current will in a short time result in destruction of the switching element.

3. Output circuit


In DC operation a distinction is made between a 2-conductor and a 3-conductor output.

The 2-conductor output can be considered equivalent to a mechanical contact. As opposed to a relay, here the polarity must be observed.

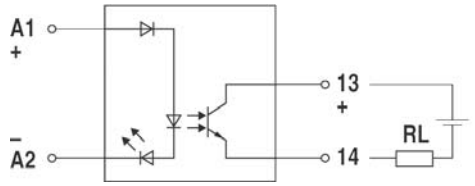

Principle: 2-conductor circuit


By contrast, a 3-conductor output is potential-specific. For safe operation it requires connection of both potentials of the output-side voltage source. In the off state a fixed link to the negative potential (earth) is made. The advantage lies in an almost constant internal resistance.

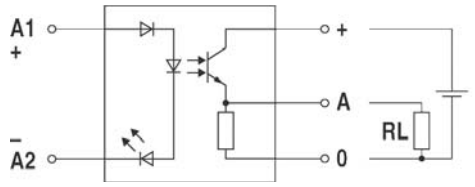

Principle: 3—conductor circuit

AC output

To switch alternating voltages, a semiconductor element for alternating voltage applications (triac) is installed downstream of the optical coupler element. Here, too, the same restrictions on the maximum operating voltage and continuous current ranges dependent on ambient temperature apply as in the case of the DC output. The maximum peak reverse voltage of the triac (e.g. 800 V) must additionally be considered in executing the alternating voltage. It must not be exceeded, in the event of either voltage fluctuations or interference voltage spikes, without destroying the triac. Consequently, all switching inductors must be wired accordingly.

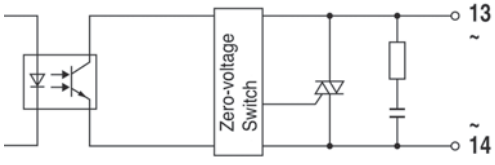

Principle: AC output

Solid State Relays - Terminology

Protective circuits


Switching of inductive consumers such as contactors, valves, motors etc. always results in a high induction overvoltage with a very steep rising edge at the moment of switch-off. The voltage, which can reach very high amplitudes, is additionally overlaid with a more or less broad high-frequency spectrum. Electronic devices respond particularly sensitively to that. So a general protection against this interference is required. Protective circuits are configured parallel to the load in order to restrict harmful induction voltages to a safe level. Different methods are available depending on the optocoupler design and application case (load).

– RC elements for AC operation


– Varistors for AC and DC operation

– Free-wheeling/suppressor diode for DC operation

The correct protective circuit for the specific application guarantees problem-free, safe functioning of all LÜTZE optical coupler modules.

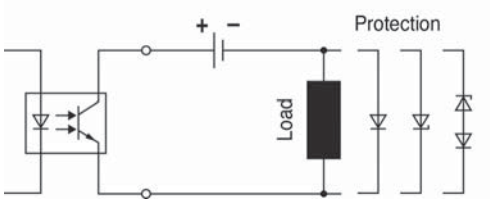


Protective circuit with DC voltage output

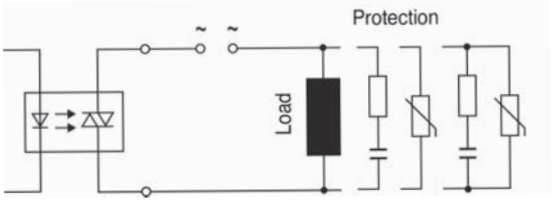


Protective circuit with AC voltage output


Application notes

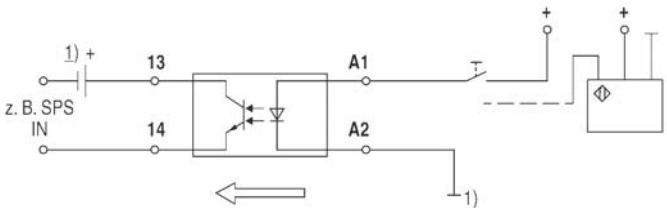

e.g. position sensing with end contact or initiator

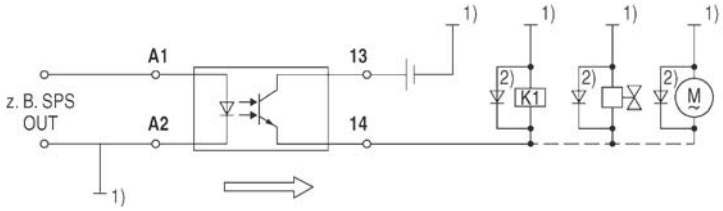

e.g. switching of contactor, solenoid valve or motor (AC load)

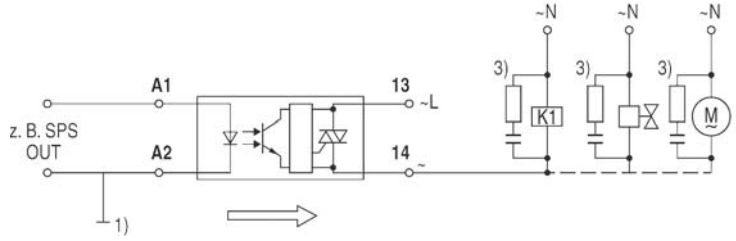

e.g. switching of contactor, solenoid valve or motor (DC load)

General

What is product reliability?

1. Reliability in a narrow sense of the term


In the industrial space, reliability is a measure of how long a particular product operates without failure.

2. Product reliability in a broad sense of the term

Every product has a finite service lifetime. This means that no product can continue normal service infinitely. When a product has broken down, the user may throw it away or repair it. The reliability of reparable products is recognised as "reliability in a broad sense of the term". For reparable products, their serviceability or maintainability is another problem. In addition, reliability of product design is becoming a serious concern for the manufacturing industry. In short, reliability has three senses: i.e. reliability of the product itself, serviceability of the product, and reliability of product design.

3. Intrinsic reliability and reliability of use


Reliability is "built in" to products. This is referred to as intrinsic reliability which consists mainly of reliability in the narrow sense. Product reliability at the user's site is called "reliability of use", which consists mainly of reliability in the broad sense. In the relay industry, reliability of use has a significance in aspects of servicing.

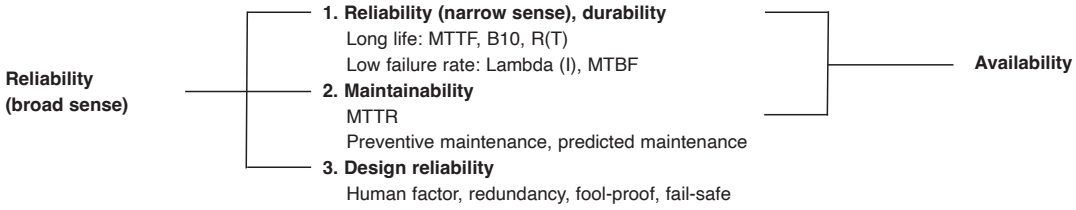



Reliability measures

The following list contains some of the most popular reliability measures.

Reliability measures	Sample representation
Degree of reliability R(T)	99.9%
MTBF	100 hours
MTTF	100 hours
Failure rate Aλ	20 FIT, 1%/hr.
Life B_{10}	50 hours

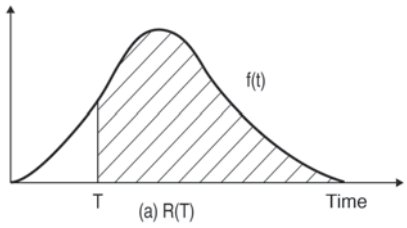

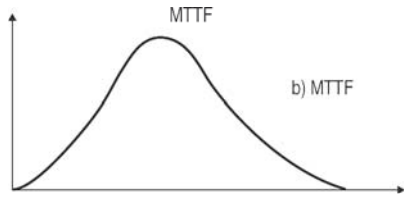

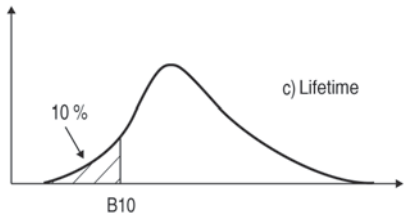

1.Degree of reliability

Degree of reliability represents percentage ratio of reliability. For example: if none of 10 light bulbs has failed for 100 hours, the degree of reliability defined in 100 hours of time is 10/10 = 100%. If only three bulbs remained alive, the degree of reliability is 3/10 = 30 %. The JIS Z8115 standard defines the degree of reliability as follows: The probability at which a system, equipment, or part provides the specified functions over the intended duration under the specified conditions.

2. MTBF

MTBF stands for Mean Time Between Failures. It designates the mean time between two failures in a system, equipment unit or part. The MTBF can only be used for repairable products. The MTBF value indicates how long a product can be used for without being repaired. Sometimes the MTBF is also used to specify the service life between repairs.

3. MTTF

MTTF stands for Mean Time To Failure. It designates the mean time until a fault occurs in the product. The MTTF is used for irreparable products such as components and materials. The MTTF is normally applied to relays.

4. Failure rate

Failure rate includes mean failure rate and momentary failure rate. Mean failure rate is defined as follows: Mean failure rate = total failures/total operating time In general, failure rate refers to momentary failure rate. This represents the probability at which a system, equipment, or part, which has continued normal operation to a certain point of time, becomes faulty in the subsequent specified time period. Failure rate is most often represented in the unit of percent/hours. For parts with low failure rates, "failure unit (Fit) = 10–9/hour" is often used instead of failure rate. Percent/count is normally used for relays.

General

5. Safe life

Safe life is an inverse of degree of reliability. It is given as value B which makes the following equation true: 1 – R(B) = t %
In general, „B[1 – R(B)] = 10 %“ is more often used. In some cases this represents a more practical value of reliability than MTTF.

Failure

1. What is failure?

Failure is defined as a state of system, equipment, or component in which part of all of its functions are impaired or lost.

2. Bathtub curve

A product's failure rate throughout its lifetime is depicted as a bathtub curve (see diagram). Failure rate is high at the beginning and end of its service lifetime.

(I) Initial failure period

The high failure rate in the initial failure period is derived from latent design errors, process errors, and many other causes. Initial failures are screened at the manufacturer's site through burn-in processes. This process is called debugging, performing aging or screening.

(II) Accidental failure period

The initial failure period is followed by a long period with low, stable failure rate. In this period, called accidental failure period, failures occurs at random along the time axis. While zero accidental failure rate is desirable, this is actually not practical in the real world.

(III) Wear-out failure period


In the final stage of the product's service lifetime comes the wear-out failure period, in which the life of the product expires due to wear or fatigue. Preventive maintenance is effective for this type of failure. The timing of a relay's wear-out failure can be predicted with a certain accuracy from the past record of uses. The use of a relay is intended only in the accidental failure period, and this period virtually represents the service lifetime of the relay.

3. Weibull analysis


Weibull analysis is often used for classifying a product's failure patterns and to determine its lifetime. Weibull distribution is expressed by the following equation:

$$f(x) = \frac{m}{\alpha}(\chi-\gamma)^{m-1} e^{-\frac{(\chi-\gamma)^m}{\alpha}}$$

m: Figure parameter α: Measurement parameter: γ: Position
parameterm: Zahlparameter α: Maßparameter: γ:

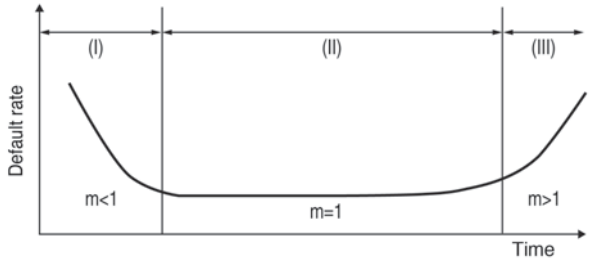

Bathtub curve

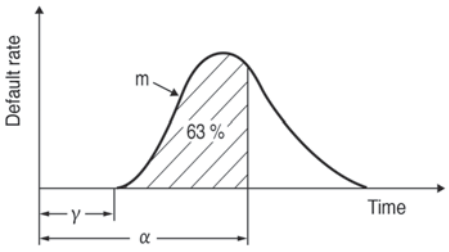

Weibull distribution can be adopted to the actual failure rate distribution if the three variables are estimated.
The Weibull probability chart is a simpler alternative to complex calculation formulas. The chart provides the following advantages:

- The Weibull distribution has the closest proximity to the actual lifetime distribution.
- The Weibull probability chart is easy to use.
- Different types of failures can be identified on the chart. The following describes the correlation with the bathtub curve. The value of the parameter "m" represents the type of failure.

- When m < 1: Initial failure
- When m = 1: Accidental failure
- When m > 1: Wear-out failure

Output Relay Interface, relay with 1 directional contact / SPDT relay, pluggable
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$







Input		Clearance/creepage dist.	
Rated voltage U_N	DC 12 V	(control/load side)	>5.5 mm
Input voltage range	9.6 V – 15 V		
Rated current I_N	17.2 mA	**General**	
Interrupting voltage	<1.2 V	Housing material	PA 6.6 (UL 94 V-0)
Protection device Input	Varistor	Color of the housing	RAL 7012
	Reverse diode		Basalt grey
Max. length of connecting lead	1000 m	Degree of protection	IP20
Status display input	LED green	Mounting	DIN rail mountable TS35 (EN 60715)
Output		Installation position	Any
Contact type	1 changeover contacts / SPDT	Insulation voltage input / output	4.0 kV_{eff}
Min. switching voltage	AC/DC 17 V	Rated insulation voltage (EN 50178)	300 V
Max. switching voltage	AC/DC 250 V	Safe isolation	yes
Min. switching current	AC/DC 5 mA	Operation temperature range	-25 °C … +60 °C
Max. switching current	AC/DC 6 A	Storage temperature range	-40 °C … +80 °C
Switching capacity AC 15	3 A	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 76.0 mm
Switching capacity DC 13	1 A @ 24 V	Weight/unit	0.03 kg
	200 mA @ 125 V	Standards	EN 60947-1
	100 mA @ 250 V		EN 60947-5-1
Max. switching capacity	1500 VA / 144 W		EN 61000-6-2
Contact material	$AgSnO_2$		EN 61000-6-4
Mechanical service life	> 10 x 10^6 operations		UL 508
Switch-on delay	7 ms		DNV-CG-0339
Shutdown delay	13 ms	Certifications	cULus (E135145)
			DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
760019.1000	LCIS-RS12DC-S-1U	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
761019.1000	LCIS-RS12DC-PI-1U	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Further product information at
www.luetze.com

Output Relay Interface, relay with 1 directional contact / SPDT relay, pluggable AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$







Input			
Status display input	LED green		
Output			
Contact type	1 changeover contacts / SPDT		
Min. switching voltage	AC/DC 17 V		
Max. switching voltage	AC/DC 250 V		
Min. switching current	AC/DC 5 mA		
Max. switching current	AC/DC 6 A		
Switching capacity AC 15	3 A		
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V		
Max. switching capacity	1500 VA / 144 W		
Contact material	$AgSnO_2$		
Mechanical service life	> 10 x 10^6 operations		
Protection device	None		
Clearance/creepage dist. (control/load side)	>5.5 mm		
General			
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing		RAL 7012 Basalt grey	
Degree of protection		IP20	
Mounting		DIN rail mountable TS35 (EN 60715)	
Installation position		Any	
Insulation voltage input / output		4.0 kV_{eff}	
Safe isolation		yes	
Operation temperature range		-25 °C … +60 °C	
Storage temperature range		-40 °C … +80 °C	
Dimensions (w × h × d)		6.2 mm × 90.0 mm × 76.0 mm	
Weight/unit		0.035 kg	
Standards		EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339	
Certifications		cULus (E135145) DNV (TAA000024Y)	

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N	Interrupting voltage	Protection device Input	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
760020.1000	LCIS-RS24DC-S-1U	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
760021.1000	LCIS-RS24UP-S-1U	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
760061.1000	LCIS-RS230UP-S-1U	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.8 V	Bridge rectifier	5
760051.1000	LCIS-RS120UP-S-1U	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
761020.1000	LCIS-RS24DC-PI-1U	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
761021.1000	LCIS-RS24UP-PI-1U	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
761051.1000	LCIS-RS120UP-PI-1U	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
761061.1000	LCIS-RS230UP-PI-1U	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.8 V	Bridge rectifier	5


Dimensions




Dimensions



PIN assignment



PIN assignment



Output Relay Interface, relay with 1 directional contact / SPDT relay, pluggable
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$ + 5 µm HV







Input		Color of the housing	RAL 7012 Basalt grey
Status display input	LED green		
Output		Degree of protection	IP20
Contact type	1 changeover contacts / SPDT	Mounting	DIN rail mountable TS35 (EN 60715)
Min. switching voltage	AC/DC 1 V	Installation position	Any
Max. switching voltage	AC/DC 250 V	Insulation voltage input / output	4.0 kV_{eff}
Min. switching current	AC/DC 1 mA	Rated insulation voltage (EN 50178)	300 V
Max. switching current	AC/DC 6 A	Safe isolation	yes
Switching capacity AC 15	3 A	Operation temperature range	-25 °C … +60 °C
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V	Storage temperature range	-40 °C … +80 °C
		Dimensions (w × h × d)	6.2 mm × 93.0 mm × 76.0 mm
Max. switching capacity	1500 VA / 144 W	Weight/unit	0.03 kg
Contact material	$AgSnO_2$ + 5 µm HV	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508
Mechanical service life	> 10 x 10^6 operations		
Protection device	None		
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	DNV-CG-0339 cULus (E135145) DNV (TAA000024Y)
General			
Housing material	PA 6.6 (UL 94 V-0)		

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N	Interrupting voltage	Protection device Input	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
760020.1010	LCIS-RS24DC-S-1U-HTV	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
760021.1010	LCIS-RS24UP-S-1U-HTV	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
760051.1010	LCIS-RS120UP-S-1U-HTV	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
760061.1010	LCIS-RS230UP-S-1U-HTV	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.8 V	Bridge rectifier	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
761020.1010	LCIS-RS24DC-PI-1U-HTV	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
761021.1010	LCIS-RS24UP-PI-1U-HTV	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
761051.1010	LCIS-RS120UP-PI-1U-HTV	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
761061.1010	LCIS-RS230UP-PI-1U-HTV	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.8 V	Bridge rectifier	5


Dimensions




Dimensions



PIN assignment



PIN assignment



Output Relay Interface, relay with 1 changeover contact
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$







Input		Clearance/creepage dist.	
Rated voltage U_N	DC 12 V	(control/load side)	>5.5 mm
Input voltage range	9.6 V – 15 V		
Rated current I_N	17.2 mA	**General**	
Interrupting voltage	<1.2 V	Housing material	PA 6.6 (UL 94 V-0)
Protection device Input	Varistor	Color of the housing	RAL 7012
	Reverse diode		Basalt grey
Max. length of connecting lead	1000 m	Degree of protection	IP20
Status display input	LED green	Mounting	DIN rail mountable TS35 (EN 60715)
Output		Installation position	Any
Contact type	1 changeover contacts / SPDT	Insulation voltage input / output	4.0 kV_{eff}
Min. switching voltage	AC/DC 17 V	Rated insulation voltage (EN 50178)	300 V
Max. switching voltage	AC/DC 250 V	Safe isolation	yes
Min. switching current	AC/DC 5 mA	Operation temperature range	-25 °C … +60 °C
Max. switching current	AC/DC 6 A	Storage temperature range	-40 °C … +80 °C
Switching capacity AC 15	3 A	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Switching capacity DC 13	1 A @ 24 V	Weight/unit	0.03 kg
	200 mA @ 125 V	Standards	EN 60947-1
	100 mA @ 250 V		EN 60947-5-1
Max. switching capacity	1500 VA / 144 W		EN 61000-6-2
Contact material	$AgSnO_2$		EN 61000-6-4
Mechanical service life	> 10 x 10^6 operations		UL 508
Switch-on delay	7 ms		DNV-CG-0339
Shutdown delay	13 ms	Certifications	cULus (E135145)
			DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
760019.0000	LCIS-RGA12DC-S-1U	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
761019.0000	LCIS-RGA12DC-PI-1U	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Output Relay Interface, relay with 1 directional contact / SPDT relay
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$







Input		Color of the housing	RAL 7012 Basalt grey
Status display input	LED green	Degree of protection	IP20
Output		Mounting	DIN rail mountable TS35 (EN 60715)
Contact type	1 changeover contacts / SPDT	Installation position	Any
Min. switching voltage	AC/DC 17 V	Insulation voltage input / output	4.0 kV_{eff}
Max. switching voltage	AC/DC 250 V	Rated insulation voltage (EN 50178)	300 V
Min. switching current	AC/DC 5 mA	Safe isolation	yes
Max. switching current	AC/DC 6 A	Operation temperature range	-25 °C … +60 °C
Switching capacity AC 15	3 A	Storage temperature range	-40 °C … +80 °C
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Max. switching capacity	1500 VA / 144 W	Weight/unit	0.03 kg
Contact material	$AgSnO_2$	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508
Mechanical service life	> 10 x 10^6 operations		
Protection device	None		
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	DNV-CG-0339 cULus (E135145) DNV (TAA000024Y)
General			
Housing material	PA 6.6 (UL 94 V-0)		

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N	Interrupting voltage	Protection device Input	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
760020.0000	LCIS-RGA24DC-S-1U	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
760021.0000	LCIS-RGA24UP-S-1U	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
760051.0000	LCIS-RGA120UP-S-1U	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
760061.0000	LCIS-RGA230UP-S-1U	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
761020.0000	LCIS-RGA24DC-PI-1U	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
761021.0000	LCIS-RGA24UP-PI-1U	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
761051.0000	LCIS-RGA120UP-PI-1U	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
761061.0000	LCIS-RGA230UP-PI-1U	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5


Dimensions




Dimensions



PIN assignment



PIN assignment



Output relay interface, relay with 1 change over contact
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$ + 5 µm HV







Input			
Status display input	LED green		
Output			
Contact type	1 changeover contacts / SPDT		
Min. switching voltage	AC/DC 1 V		
Max. switching voltage	AC/DC 250 V		
Min. switching current	AC/DC 1 mA		
Max. switching current	AC/DC 6 A		
Switching capacity AC 15	3 A		
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V		
Max. switching capacity	1500 VA / 144 W		
Contact material	$AgSnO_2$ + 5 µm HV		
Mechanical service life	> 10 x 10^6 operations		
Inrush current	16 A (4 ms)		
Protection device	None		
Clearance/creepage dist. (control/load side)	>5.5 mm		
General			
Housing material	PA 6.6 (UL 94 V-0)	Color of the housing	RAL 7012 Basalt grey
		Degree of protection	IP20
		Mounting	DIN rail mountable TS35 (EN 60715)
		Installation position	Any
		Insulation voltage input / output	4.0 kV_{eff}
		Rated insulation voltage (EN 50178)	300 V
		Safe isolation	yes
		Operation temperature range	-25 °C … +60 °C
		Storage temperature range	-40 °C … +80 °C
		Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
		Weight/unit	0.03 kg
		Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
		Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N	Interrupting voltage	Protection device Input	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
760020.0010	LCIS-RGA24DC-S-1U-HTV	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
760021.0010	LCIS-RGA24UP-S-1U-HTV	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
760051.0010	LCIS-RGA120UP-S-1U-HTV	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
760061.0010	LCIS-RGA230UP-S-1U-HTV	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
761020.0010	LCIS-RGA24DC-PI-1U-HTV	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
761021.0010	LCIS-RGA24UP-PI-1U-HTV	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
761051.0010	LCIS-RGA120UP-PI-1U-HTV	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
761061.0010	LCIS-RGA230UP-PI-1U-HTV	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5


Dimensions




Dimensions



PIN assignment



PIN assignment



Input Relay Interface, relay with 1 directional contact / SPDT relay
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$







Input		Color of the housing	RAL 7012 Basalt grey
Status display input	LED green	Degree of protection	IP20
Output		Mounting	DIN rail mountable TS35 (EN 60715)
Contact type	1 changeover contacts / SPDT	Installation position	Any
Min. switching voltage	AC/DC 17 V	Insulation voltage input / output	4.0 kV_{eff}
Max. switching voltage	AC/DC 250 V	Rated insulation voltage (EN 50178)	300 V
Min. switching current	AC/DC 5 mA	Safe isolation	yes
Max. switching current	AC/DC 6 A	Operation temperature range	-25 °C … +60 °C
Switching capacity AC 15	3 A	Storage temperature range	-40 °C … +80 °C
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
		Weight/unit	0.03 kg
Max. switching capacity	1500 VA / 144 W	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508
Contact material	$AgSnO_2$		
Mechanical service life	> 10 x 10^6 operations		
Protection device	None		
Clearance/creepage dist. (control/load side)	>5.5 mm		DNV-CG-0339
		Certifications	cULus (E135145) DNV (TAA000024Y)
General			
Housing material	PA 6.6 (UL 94 V-0)		

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N	Interrupting voltage	Protection device Input	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
760023.0000	LCIS-RGE24DC-S-1U	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
760024.0000	LCIS-RGE24UP-S-1U	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
760054.0000	LCIS-RGE120UP-S-1U	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
760064.0000	LCIS-RGE230UP-S-1U	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
761023.0000	LCIS-RGE24DC-PI-1U	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
761024.0000	LCIS-RGE24UP-PI-1U	AC/DC 24 V	21.6 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
761054.0000	LCIS-RGE120UP-PI-1U	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
761064.0000	LCIS-RGE230UP-PI-1U	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5


Dimensions




Dimensions



PIN assignment



PIN assignment



Further product information at
www.luetze.com

Input Relay Interface, relay with 1 directional contact / SPDT relay
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: $AgSnO_2$ + 5 µm HV







Input		Color of the housing	RAL 7012
Status display input	LED green		Basalt grey
		Degree of protection	IP20
Output		Mounting	DIN rail mountable TS35 (EN 60715)
Contact type	1 changeover contacts / SPDT		
Max. switching voltage	AC/DC 250 V	Installation position	Any
Max. switching current	AC/DC 6 A	Insulation voltage input / output	4.0 kV_{eff}
Switching capacity AC 15	3 A	Rated insulation voltage (EN 50178)	300 V
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V	Safe isolation	yes
		Operation temperature range	-25 °C … +60 °C
		Storage temperature range	-40 °C … +80 °C
Max. switching capacity	1500 VA / 144 W	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Contact material	$AgSnO_2$ + 5 µm HV	Weight/unit	0.03 kg
Mechanical service life	> 10 x 10^6 operations	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Inrush current	16 A (4 ms)		
Protection device	None		
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	cULus (E135145) DNV (TAA000024Y)
General			
Housing material	PA 6.6 (UL 94 V-0)		

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N	Interrupting voltage	Protection device Input	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
760023.0010	LCIS-RGE24DC-S-1U-HTV	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
760024.0010	LCIS-RGE24UP-S-1U-HTV	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
760054.0010	LCIS-RGE120UP-S-1U-HTV	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
760064.0010	LCIS-RGE230UP-S-1U-HTV	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16							
761023.0010	LCIS-RGE24DC-PI-1U-HTV	DC 24 V	19.2 V – 30 V	10.7 mA	<1.7 V	Reverse diode	5
761024.0010	LCIS-RGE24UP-PI-1U-HTV	AC/DC 24 V	19.2 V – 30 V	10.6 mA	<2.0 V	Bridge rectifier	5
761054.0010	LCIS-RGE120UP-PI-1U-HTV	AC/DC 115 V	92 V – 126.5 V	3.7 mA	<7.7 V	Bridge rectifier	5
761064.0010	LCIS-RGE230UP-PI-1U-HTV	AC/DC 230 V	184 V – 253 V	3.6 mA	<12.7 V	Bridge rectifier	5


Dimensions




Dimensions




PIN assignment



PIN assignment



Solid state relay, 2-conductor technology
Switching element max. DC 60 V / 0,5 A, DC 60 V / 2 A
Screw terminal / Push-In






Input	
Rated voltage U_N	DC 24 V
Rated current I_N	>4 mA
Input voltage range	11 V – 30 V
Protection device Input	Varistor
Status display input	LED green
Output	
Switching element	MOSFET N/O contact
Min. switching voltage	DC 10 V
Max. switching voltage	DC 60 V
Switch-on delay	<400 µs
Shutdown delay	<2 ms
Inrush current	10 A/20 ms @ 1 Hz
Leak current	<10 µA
Switching frequency	Max. 50 Hz
Protection device	Varistor
Short circuit	Non short-circuit proof
Clearance/creepage dist. (control/load side)	>5 mm


General	
Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	4.0 kV_{eff}
Safe isolation	yes
Operation temperature range	-25 °C … +60 °C
Storage temperature range	-40 °C … +80 °C
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Weight/unit	0.03 kg
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Load	Leak current	Min. switching current	Max. switching current	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16						
763020.0120	LCIS-SR-DC-2L-200120-S	DC 60 V / 2 A	<10 µA	1 mA	2 A	5
763020.0110	LCIS-SR-DC-2L-200110-S	DC 60 V / 0.5 A	<10 µA	1 mA	0.5 A	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16						
764020.0120	LCIS-SR-DC-2L-200120-PI	DC 60 V / 2 A	<10 µA	1 mA	2 A	5
764020.0110	LCIS-SR-DC-2L-200110-PI	DC 60 V / 0.5 A	<10 µA	1 mA	0.5 A	5


Dimensions



Dimensions



PIN assignment



Further product information at
www.luetze.com

Solid state relay, 2-conductor technology
Switching element DC 60 V / DC 5 A
Screw terminal / Push-In







Input		**General**	
Rated voltage U_N	DC 24 V	Housing material	PA 6.6 (UL 94 V-0)
Input voltage range	DC 19.2 V – 30 V	Color of the housing	RAL 7012
Rated current I_N	DC 10 mA		Basalt grey
Interrupting voltage	<14 V	Degree of protection	IP20
Protection device Input	Varistor	Mounting	DIN rail mountable TS35
	Reverse diode		(EN 60715)
Status display input	LED green	Installation position	Any
		Insulation voltage input / output	4.0 kV_{eff}
Output		Safe isolation	yes
Min. switching voltage	DC 10 V	Operation temperature range	-25 °C … +60 °C
Max. switching voltage	DC 60 V	Storage temperature range	-40 °C … +80 °C
Min. switching current	DC 1 mA	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Max. switching current	DC 5 A @ 100 % ED	Weight/unit	0.03 kg
Switch-on delay	<250 µs @ I_{max}	Standards	EN 60947-1
Shutdown delay	<150 µs @ I_{max}		EN 60947-5-1
Inrush current	25 A/20 ms @ 1 Hz		EN 61000-6-2
Leak current	<1 µA		EN 61000-6-4
Switching frequency	1 kHz		UL 508
Protection device	Varistor		DNV-CG-0339
Short circuit	Non short-circuit proof	Certifications	cULus (E135145)
Clearance/creepage dist. (control/load side)	>5.5 mm		DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.0130	LCIS-SR-DC-2L-200130-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.0130	LCIS-SR-DC-2L-200130-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions




Dimensions



PIN assignment



Solid state relay, 2-conductor technology
Switching element DC 24 V / DC 10 A
Screw terminal / Push-In







Input		(control/load side)	>5.5 mm
Rated voltage U_N	DC 24 V		
Input voltage range	DC 19.2 V – 30 V	**General**	
Rated current I_N	DC 10 mA	Housing material	PA 6.6 (UL 94 V-0)
Interrupting voltage	<14 V	Color of the housing	RAL 7012 Basalt grey
Protection device Input	Varistor, Reverse diode	Degree of protection	IP20
Status display input	LED green	Mounting	DIN rail mountable TS35 (EN 60715)
Output		Installation position	Any
Min. switching voltage	DC 10 V	Insulation voltage input / output	4.0 kV_{eff}
Max. switching voltage	DC 30 V	Safe isolation	yes
Min. switching current	DC 1 mA	Operation temperature range	-25 °C … +60 °C
Max. switching current	DC 10 A @ 100 % ED	Storage temperature range	-40 °C … +80 °C
Switch-on delay	<250 µs @ I_{max}	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Shutdown delay	<150 µs @ I_{max}	Weight/unit	0.03 kg
Inrush current	50 A/20 ms @ 1 Hz	Standards	EN 60947-1, EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, DNV-CG-0339
Leak current	<10 µA		
Switching frequency	1 kHz		
Protection device	Varistor		
Short circuit	Non short-circuit proof		
Clearance/creepage dist.		Certifications	DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763050.0140	LCIS-SR-DC-2L-500140-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764050.0140	LCIS-SR-DC-2L-500140-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Solid state relay, 2-conductor technology
Switching element max. AC 230 V / 2 A
Screw terminal / Push-In







Input		**General**	
Rated voltage U_N	DC 24 V	Housing material	PA 6.6 (UL 94 V-0)
Input voltage range	11 V – 30 V	Color of the housing	RAL 7012 Basalt grey
Rated current I_N	9 mA	Degree of protection	IP20
Interrupting voltage	<9 V	Mounting	DIN rail mountable TS35 (EN 60715)
Protection device Input	Varistor	Installation position	Any
Status display input	LED green	Insulation voltage input / output	4.0 kV_{eff}
Output		Safe isolation	yes
Min. switching voltage	AC 20 V	Operation temperature range	-25 °C … +60 °C
Max. switching voltage	AC 264 V	Storage temperature range	-40 °C … +80 °C
Min. switching current	5 mA	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Max. switching current	2 A	Weight/unit	0.03 kg
Switch-on delay	<10 ms	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Shutdown delay	<10 ms		
Inrush current	50 A @ 20 ms up to 60 °C		
Leak current	1 mA		
Switching frequency	Max. 10 Hz		
Protection device	Varistor		
Short circuit	Non short-circuit proof		
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.0220	LCIS-SR-DC/AC-2L-200220-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.0220	LCIS-SR-DC/AC-2L-200220-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions




Dimensions



PIN assignment



Solid state relay, 2-conductor technology
Switching element AC/DC 240 V / 2 A
Screw terminal / Push-In







Input		(control/load side)	>5.5 mm
Rated voltage U_N	DC 24 V		
Input voltage range	DC 16.8 V – 30 V	**General**	
Rated current I_N	DC 9 mA	Housing material	PA 6.6 (UL 94 V-0)
Interrupting voltage	<10 V	Color of the housing	RAL 7012 Basalt grey
Protection device Input	Varistor, Reverse diode	Degree of protection	IP20
Status display input	LED green	Mounting	DIN rail mountable TS35 (EN 60715)
Output		Installation position	Any
Min. switching voltage	AC/DC 2 V	Insulation voltage input / output	4.0 kV_{eff}
Max. switching voltage	AC/DC 253 V	Safe isolation	yes
Min. switching current	AC/DC 1 mA	Operation temperature range	-25 °C … +60 °C
Max. switching current	AC/DC 2 A @ 100 % ED	Storage temperature range	-40 °C … +80 °C
Switch-on delay	<150 µs @ I_{max}	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Shutdown delay	<100 µs @ I_{max}	Weight/unit	0.03 kg
Inrush current	10 A/20 ms @ 1 Hz	Standards	EN 60947-1, EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, DNV-CG-0339
Leak current	AC: <0.2 mA, DC: <1µA		
Switching frequency	500 Hz		
Protection device	Varistor		
Short circuit	Non short-circuit proof		
Clearance/creepage dist.		Certifications	DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.0500	LCIS-SR-DC/UC-2L-200500-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.0500	LCIS-SR-DC/UC-2L-200500-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Solid state relay, 2-conductor technology
Switching element DC 24 V / DC 0,5 A / 20 kHz
Screw terminal / Push-In







Input		**General**	
Rated voltage U_N	DC 24 V	Housing material	PA 6.6 (UL 94 V-0)
Rated current I_N	+A1: DC 12 mA / +A3: DC 0.7 mA	Color of the housing	RAL 7012
Interrupting voltage	<2.7 V		Basalt grey
Protection device Input	Varistor	Degree of protection	IP20
	Reverse diode	Mounting	DIN rail mountable TS35 (EN 60715)
Status display input	LED green	Installation position	Any
Output		Insulation voltage input / output	3.75 kV_{eff}
Min. switching voltage	DC 5 V	Safe isolation	yes
Max. switching voltage	DC 31.2 V	Operation temperature range	-25 °C … +60 °C
Min. switching current	DC 10 mA	Storage temperature range	-40 °C … +80 °C
Max. switching current	DC 0.5 A @ 100 % ED	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Switch-on delay	<15 µs @ I_{max}, U_N	Weight/unit	0.03 kg
Shutdown delay	<20 µs @ I_{max}, U_N	Standards	EN 60947-1
Inrush current	2.5 A/20 ms @ 1 Hz		EN 60947-5-1
Leak current	<10 µA		EN 61000-6-2
Switching frequency	Approx. 20 kHz		EN 61000-6-4
Protection device	Suppressor diode		UL 508
Short circuit	Non short-circuit proof		DNV-CG-0339
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.0091	LCIS-SR-DC-2L-200091-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.0091	LCIS-SR-DC-2L-200091-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Solid state relay, 2-conductor technology, pluggable
Switching element DC 30 V / DC 3 A
Screw terminal / Push-In






Input	
Rated voltage U_N	DC 24 V
Input voltage range	DC 19.2 V – 30 V
Rated current I_N	DC 11.3 mA
Interrupting voltage	<9.4 V
Protection device Input	Varistor Bridge rectifier
Status display input	LED green
Output	
Min. switching voltage	DC 10 V
Max. switching voltage	DC 60 V
Min. switching current	DC 1 mA
Max. switching current	DC 5 A @ 100 % ED
Switch-on delay	<150 µs
Shutdown delay	<600 µs
Leak current	<1 mA
Switching frequency	10 Hz
Protection device	Suppressor diode
Short circuit	Non short-circuit proof
Clearance/creepage dist. (control/load side)	>5.5 mm


General	
Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	2.5 kV_{eff}
Safe isolation	yes
Operation temperature range	-25 °C … +60 °C
Storage temperature range	-25 °C … +80 °C
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 76.0 mm
Weight/unit	0.03 kg
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.1020	LCIS-SRS-DC-2L-201020-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.1020	LCIS-SRS-DC-2L-201020-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



(5 = n.c.)

Solid state relay, 2-conductor technology, pluggable
Switching element AC 240 V / AC 0.75 A
Screw terminal / Push-In






Input	
Rated voltage U_N	DC 24 V
Input voltage range	DC 19.2 V – 30 V
Rated current I_N	DC 11.3 mA
Interrupting voltage	<1.9 V
Protection device Input	Varistor Bridge rectifier
Status display input	LED green
Output	
Min. switching voltage	AC 24 V
Max. switching voltage	AC 253 V
Min. switching current	AC 0.05 A
Max. switching current	AC 0.75 A
Switch-on delay	1 ms + 1/2 period
Shutdown delay	1 ms + 1/2 period
Leak current	<AC 1.5 mA
Switching frequency	10 Hz
Protection device	RC-Snubber
Short circuit	Non short-circuit proof
Clearance/creepage dist. (control/load side)	>5.5 mm


General	
Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	3.5 kV_{eff}
Safe isolation	no
Operation temperature range	-25 °C … +60 °C
Storage temperature range	-40 °C … +70 °C
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 76.0 mm
Weight/unit	0.03 kg
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.1210	LCIS-SRS-AC-2L-201210-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.1210	LCIS-SRS-AC-2L-201210-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



(5 = n.c.)

Solid state relay, 2-conductor technology, pluggable
Switching element DC 30 V / DC 2 A
Screw terminal / Push-In






Input	
Rated voltage U_N	AC 230 V
Input voltage range	AC 184 V – 253 V
Rated current I_N	AC 3.3 mA
Interrupting voltage	<AC 80 V
Protection device Input	Bridge rectifier
Status display input	LED green
Output	
Min. switching voltage	DC 10 V
Max. switching voltage	DC 30 V
Min. switching current	DC 1 mA
Max. switching current	DC 2A
Switch-on delay	6 ms (@DC)
Shutdown delay	15 ms (@DC)
Leak current	<DC 1 mA
Switching frequency	10 Hz
Protection device	Suppressor diode
Short circuit	Non short-circuit proof
Clearance/creepage dist. (control/load side)	>5.5 mm


General	
Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	2.5 kV_{eff}
Safe isolation	no
Operation temperature range	-25 °C … +60 °C
Storage temperature range	-40 °C … +80 °C
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 76.0 mm
Weight/unit	0.03 kg
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763070.1020	LCIS-SRS-AC/DC-2L-701020-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764070.1020	LCIS-SRS-AC/DC-2L-701020-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



(5 = n.c.)

Solid state relay, 3-conductor technology
Switching element max. DC 30 V / 3 A
Screw terminal / Push-In







Input		**General**	
Rated voltage U_N	AC/DC 110–230 V	Housing material	PA 6.6 (UL 94 V-0)
Input voltage range	110 V – 230 V	Color of the housing	RAL 7012
Rated current I_N	4 mA		Basalt grey
Interrupting voltage	<46 V	Degree of protection	IP20
Protection device Input	Varistor	Mounting	DIN rail mountable TS35 (EN 60715)
Status display input	LED green	Installation position	Any
Output		Insulation voltage input / output	4.0 kV_{eff}
Min. switching voltage	DC 10 V	Safe isolation	yes
Max. switching voltage	DC 30 V	Operation temperature range	-25 °C … +60 °C
Min. switching current	1 mA	Storage temperature range	-40 °C … +80 °C
Max. switching current	3 A	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Switch-on delay	<0.3 ms	Weight/unit	0.03 kg
Shutdown delay	<0.4 ms	Standards	EN 60947-1
Inrush current	20 A/20 ms @ 1 Hz		EN 60947-5-1
Leak current	<100 µA		EN 61000-6-2
Switching frequency	Max. 10 Hz		EN 61000-6-4
Protection device	Suppressor diode		UL 508
Short circuit	Short circuit protection		DNV-CG-0339
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763080.0350	LCIS-SRKF-AC/DC-3L-800350-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764080.0350	LCIS-SRKF-AC/DC-3L-800350-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Solid state relay, 3-conductor technology
Switching element DC 30 V / 5 A
Screw terminal / Push-In







Input			
Rated voltage U_N	DC 24 V	**General**	
Rated current I_N	DC 8 mA	Housing material	PA 6.6 (UL 94 V-0)
Input voltage range	11 V – 30 V	Color of the housing	RAL 7012 Basalt grey
Interrupting voltage	<6 V	Degree of protection	IP20
Protection device Input	Suppressor diode	Mounting	DIN rail mountable TS35 (EN 60715)
Status display input	LED green	Installation position	Any
Output		Insulation voltage input / output	4.0 kV_{eff}
Switching element	MOSFET N/O contact	Safe isolation	yes
Min. switching voltage	DC 10 V	Operation temperature range	-25 °C … +60 °C
Max. switching voltage	DC 30 V	Storage temperature range	-40 °C … +80 °C
Switch-on delay	<0.3 ms	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Shutdown delay	<0.4 ms	Weight/unit	0.03 kg
Inrush current	20 A/20 ms @ 1 Hz	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Leak current	<100 µA		
Switching frequency	Max. 100 Hz		
Protection device	Suppressor diode		
Short circuit	Short circuit protection		
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Leak current	Min. switching current	Max. switching current	PU (units)
Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16					
763020.0320	LCIS-SRKF-DC-3L-200320-S	<100 µA	1 mA	2 A	5
763020.0330	LCIS-SRKF-DC-3L-200330-S	1 mA	1 mA	5 A	5
Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16					
764020.0320	LCIS-SRKF-DC-3L-200320-PI	<100 µA	1 mA	2 A	5
764020.0330	LCIS-SRKF-DC-3L-200330-PI	1 mA	1 mA	5 A	5


Dimensions



Dimensions



PIN assignment



Solid state relay, 3-conductor technology
Switching element DC 24 V / DC 10 A
Screw terminal / Push-In






Input	
Rated voltage U_N	DC 24 V
Input voltage range	DC 19.2 V – 30 V
Rated current I_N	DC 6.5 mA
Interrupting voltage	<5 V
Protection device Input	Varistor Reverse diode
Status display input	LED green
Output	
Min. switching voltage	DC 10 V
Max. switching voltage	DC 30 V
Min. switching current	DC 1 mA
Max. switching current	DC 10 A @ 100 % ED
Switch-on delay	<0.2 ms @ I_{max}
Shutdown delay	<0.4 ms @ I_{max}
Inrush current	50 A/20 ms @ 1 Hz
Leak current	<100 µA
Switching frequency	50 Hz (Derating)
Protection device	Suppressor diode
Short circuit	Short circuit protection
Clearance/creepage dist. (control/load side)	>5.5 mm


General	
Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	4.0 kV_{eff}
Safe isolation	yes
Operation temperature range	-25 °C … +60 °C
Storage temperature range	-40 °C … +80 °C
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Weight/unit	0.03 kg
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.2340	LCIS-SRKF-DC-3L-202340-S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.2340	LCIS-SRKF-DC-3L-202340-PI	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Solid state relay, 3-conductor technology, manual off automatic
Switching element max. DC 30 V / 5A
Screw terminal / Push-In







Input			
Rated voltage U_N	DC 24 V	**General**	
Input voltage range	11 V – 30 V	Housing material	PA 6.6 (UL 94 V-0)
Rated current I_N	8 mA	Color of the housing	RAL 7012 Basalt grey
Interrupting voltage	<6 V	Degree of protection	IP20
Protection device Input	Suppressor diode	Mounting	DIN rail mountable TS35 (EN 60715)
Status display input	LED green	Installation position	Any
Output		Insulation voltage input / output	4.0 kV_{eff}
Min. switching voltage	DC 10 V	Safe isolation	yes
Max. switching voltage	DC 30 V	Operation temperature range	-25 °C … +60 °C
Min. switching current	5 mA	Storage temperature range	-40 °C … +80 °C
Max. switching current	5 A	Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Switch-on delay	<0.3 ms	Weight/unit	0.03 kg
Shutdown delay	<0.4 ms	Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339
Inrush current	20 A/20 ms @ 1 Hz		
Leak current	1 mA		
Switching frequency	Max. 100 Hz		
Protection device	Suppressor diode		
Short circuit	Non short-circuit proof		
Clearance/creepage dist. (control/load side)	>5.5 mm	Certifications	cULus (E135145) DNV (TAA000024Y)

Part No.	Type	Connection type	PU (units)
763020.0360	LCIS-SRKF-DC-3L-200360-SH0S	Screw terminal Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5
764020.0360	LCIS-SRKF-DC-3L-200360-PIH0S	Push-In Single wire 0.25 mm² – 2.5 mm² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm² – 1.5 mm² / AWG 24–16	5


Dimensions



Dimensions



PIN assignment



Further product information at
www.luetze.com


Replacement relay, 1 CO contact / SPDT relay, AC/DC 250 V, 6 A, 1500 VA / 144 W Contact material: $AgSnO_2$, $AgSnO_2$+5 µm HV



Input		(control/load side)	Air clearance: >6 mm, creepage clearance: >8 mm
Input voltage	DC: ±30 %		
Power consumption	DC: 170 mW	Rated insulation voltage (EN 50178)	
Interrupting voltage	DC: >0.1 U_N	Over voltage category	III
		Degree of pollution	3
Output			
Contact type	1 changeover contacts / SPDT	**General**	
Max. switching voltage	AC/DC 250 V	Degree of protection	RTIII – wash-tight
Max. switching current	6 A	Shock resistance	5g
Switching capacity AC 15	3 A	Vibration resistance	6 g, 10...150 Hz
Switching capacity DC 13	1 A @ 24 V, 200 mA @ 115 V, 100 mA @ 250 V	Insulation voltage input / output	4.0 kV_{eff}
		Safe isolation	yes
Max. switching capacity	1500 VA / 144 W	Operation temperature range	-25 °C … +60 °C
Mechanical service life	> 10 x 10^6 operations	Storage temperature range	-40 °C … +80 °C
Switch-on delay	5 ms	Dimensions (w × h × d)	5.0 mm × 28.0 mm × 15.0 mm
Shutdown delay	2.5 ms	Weight/unit	0.006 kg
Switching frequency	With load: 6 cycles/minute, without load 1,200 cycles/minute	Connection type	Plug-in
		Certifications	VDE
Clearance/creepage dist.			cULus

Part No.	Type	Rated voltage U_N	Min. switching voltage	Min. switching current	Resistor	Contact material	PU (units)
768001	Relais-SNR 12V 1W	DC 12 V	AC/DC 17 V	AC/DC 5 mA	<100 mΩ	$AgSnO_2$	20
768002	Relais-SNR 24V 1W	DC 24 V	AC/DC 17 V	AC/DC 5 mA	<100 mΩ	$AgSnO_2$	20
768003	Relais-SNR 60V 1W	DC 60 V	AC/DC 17 V	AC/DC 5 mA	<100 mΩ	$AgSnO_2$	20
768005	Relais-SNR 12V 1W htv	DC 12 V	AC/DC 1 V	AC/DC 1 mA	<30 mΩ	$AgSnO_2$ + 5 µm HV	20
768006	Relais-SNR 24V 1W htv	DC 24 V	AC/DC 1 V	AC/DC 1 mA	<30 mΩ	$AgSnO_2$ + 5 µm HV	20
768007	Relais-SNR 60V 1W htv	DC 60 V	AC/DC 1 V	AC/DC 1 mA	<30 mΩ	$AgSnO_2$ + 5 µm HV	20

Dimensions



LOCC-Box Accessories

Labeling system
200 Labeling tabs 5 × 5 mm / 6 × 12 mm
single signs



RoHS halogen free

General			
Material	PA6.6 (UL 94 V2)	Operation temperature range	-40 °C … +100 °C
Flamability according to UL 94	V2	Storage temperature range	-40 °C … +100 °C

Part No.	Type	Color	Design	Dimensions	Pin spacing mm	Weight/unit kg	PU (units)
716431	LOCC-Box-BZW 7-6431	white	200 tabs	5 × 5 mm	5	0.01	1
780981.000.2	LCOS-ZB-BZS-white-00	white	200 tabs	5 × 5 mm		0.01	10
716432	LOCC-Box-BZR 7-6432	red	200 tabs	5 × 5 mm	5	0.01	1
780982.000.2	LCOS-ZB-BZS-red-00	red	200 tabs	5 × 5 mm		0.01	10
716433	LOCC-Box-BZB 7-6433	blue	200 tabs	5 × 5 mm	5	0.01	1
780983.000.2	LCOS-ZB-BZS-blue-00	blue	200 tabs	5 × 5 mm		0.01	10
716434	LOCC-Box-BZG 7-6434	yellow	200 tabs	5 × 5 mm	5	0.01	1
780985.000.2	LCOS-ZB-BZS-white-12/6	white	120 tabs	12 × 6mm		0.01	10

Jumper combs


Insulated jumper combs
2- to 16-pin
white




General			
Material	Frianyl A3 RV0	Connection type	Plug-in
Contact material	CuZn	Rated current	DC 6 A
Contact design	Flat contact 0.5 mm Ribbing on the sides	Flamability according to UL 94	V0
		Operation temperature range	-40 °C … +80 °C
		Storage temperature range	-40 °C … +80 °C

Part No.	Type	Pole number	Color	Length mm	Pin spacing mm	Weight/unit kg	PU (units)
762803.1000	LCIS-BKW-2-polig	2	white	12.4	6.2	0.011	10
762813.1000	LCIS-BKW-4-polig	4	white	24.8	6.2	0.011	10
762823.1000	LCIS-BKW-8-polig	8	white	49.6	6.2	0.011	10
762833.1000	LCIS-BKW-16-polig	16	white	99.2	6.2	0.011	10

Dimensions

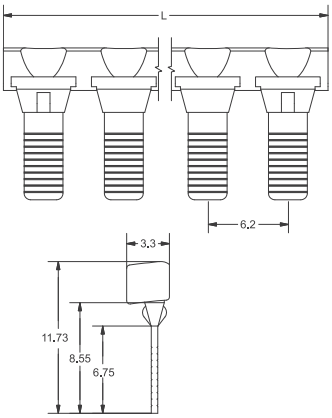

LCIS 2 / 3

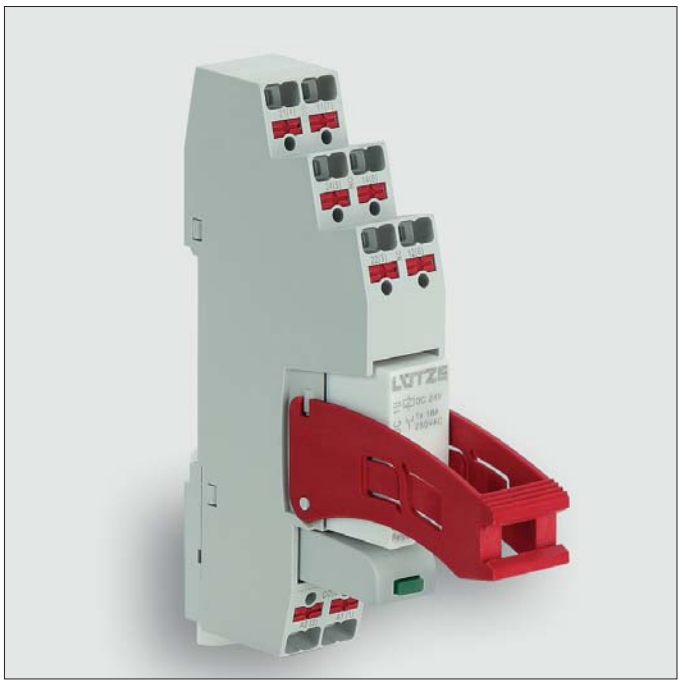




The LCIS 2/3 series consists of relays, input suppressor modules that are pluggable, locking levers, description plates and a Universal jumper.

All modules are largely compatible with market standards, and all are UL approved.

The LCIS 2/3 series offers the following features:

- Switching current up to 16 A
- LED status indicator
- Different types of suppressor modules
- Manual control
- Push-in connection equipment

Suppressor modules
All AC/DC 6 V – 230 V





Locking system





Comb-type jumper bar
Connect up to 6 modules










Labelling system

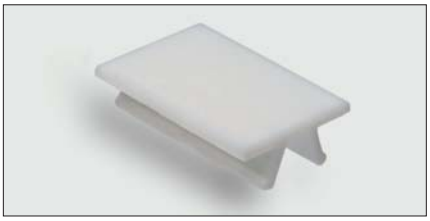

Product Focus:
LCIS
Lütze Compact Interface System


Relay-Interface, 1 CO contact / SPDT, pluggable
AC / DC 300 V, 16 A, 4000 VA
Push-In, contact material: AgNi




Input		Clearance/creepage dist.	
Status display input	LED green	(control/load side)	Air clearance: > 10 mm, creepage clearance: > 10 mm
Output			
Contact type	1 changeover contacts / SPDT	**General**	
Min. switching voltage	AC/DC 5 V	Connection type	Push-In
Max. switching voltage	AC/DC 300 V		2 × (0.20 mm² – 1.5 mm²)
Min. switching current	AC/DC 5 mA	Housing material	PA 6.6
Max. switching current	AC/DC 16 A	Color of the housing	Light grey
Switching capacity AC 15	3 A @ 120 V, 1.5 A @ 240 V	Degree of protection	IP20
Switching capacity DC 13	2 A @ 24 V, 220 mA @ 120 V, 100 mA @ 250 V	Mounting	DIN rail mountable TS35 (EN 60715)
Max. switching capacity	4000 VA	Insulation voltage input / output	5.0 kV_{eff}
Contact material	AgNi	Safe isolation	yes
Mechanical service life	> 3 x 10^7 operations	Operation temperature range	-40 °C … +70 °C
Switch-on delay	7 ms	Storage temperature range	-40 °C … +85 °C
Shutdown delay	3 ms	Dimensions (w × h × d)	15.9 mm × 97.0 mm × 75.8 mm
Protection device	None	Weight/unit	0.065 kg
		Certifications	cURus

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N A	Interrupting voltage	Power consumption	Protection device Input	PU (units)
Push-In 2 × (0.20 mm² – 1.5 mm²)								
770042	LCIS2-RSP12DC-PI-1U	DC 12 V	8.4 V – 18 V	0.035	<1.2 V	0.4 W	Free-wheeling diode	10
770043	LCIS2-RSP24DC-PI-1U	DC 24 V	16.8 V – 36 V	0.018	<2.4 V	0.4 W	Free-wheeling diode	10
770044	LCIS2-RSP115AC-PI-1U	AC 115 V	96 V – 144 V	0.14	<18 V	0.75 VA	Varistor	10
770045	LCIS2-RSP230AC-PI-1U	AC 230 V	184 V – 276 V	0.007	<34.5 V	0.75 VA	Varistor	10

Dimensions




Circuit diagram



DC version

Circuit diagram



AC version


Relay-Interface, 2 CO contact / SPDT, pluggable
AC / DC 300 V, 8 A, 2000 VA
Push-In, Contact material: AgNi




Input		Clearance/creepage dist.	
Status display input	LED green	(control/load side)	Air clearance: > 10 mm, creepage clearance: > 10 mm
Output			
Contact type	2 changeover contacts / DPDT	**General**	
Min. switching voltage	AC/DC 5 V	Connection type	Push-In
Max. switching voltage	AC/DC 300 V		2 × (0.20 mm² – 1.5 mm²)
Min. switching current	AC/DC 5 mA	Housing material	PA 6.6
Max. switching current	AC/DC 8 A	Color of the housing	Light grey
Switching capacity AC 15	3 A @ 120 V, 1.5 A @ 240 V	Degree of protection	IP20
Switching capacity DC 13	2 A @ 24 V, 220 mA @ 120 V, 100 mA @ 250 V	Mounting	DIN rail mountable TS35 (EN 60715)
Max. switching capacity	2000 VA	Insulation voltage input / output	5.0 kV_{eff}
Contact material	AgNi	Safe isolation	yes
Mechanical service life	> 3 x 10^7 operations	Operation temperature range	-40 °C … +70 °C
Switch-on delay	7 ms	Storage temperature range	-40 °C … +85 °C
Shutdown delay	3 ms	Dimensions (w × h × d)	15.9 mm × 97.0 mm × 75.8 mm
Protection device	None	Weight/unit	0.065 kg
		Certifications	cURus

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N A	Interrupting voltage	Power consumption	Protection device Input	PU (units)
Push-In 2 × (0.20 mm² – 1.5 mm²)								
770052	LCIS2-RSP12DC-PI-2U	DC 12 V	8.4 V – 18 V	0.035	<1.2 V	0.4 W	Free-wheeling diode	10
770053	LCIS2-RSP24DC-PI-2U	DC 24 V	16.8 V – 31.2 V	0.018	<2.4 V	0.4 W	Free-wheeling diode	10
770054	LCIS2-RSP115AC-PI-2U	AC 115 V	96 V – 144 V	0.014	<18 V	0.75 VA	Varistor	10
770055	LCIS2-RSP230AC-PI-2U	AC 230 V	184 V – 276 V	0.07	<34.5 V	0.75 VA	Varistor	10

Dimensions




Circuit diagram



DC version

Circuit diagram



AC version


Relay-Interface, 4 CO contact / SPDT, pluggable
AC / DC 250 V, 6 A, 1500 VA
Push-In, Contact material: AgNi




Input		Clearance/creepage dist.	
Status display input	LED green	(control/load side)	Air clearance: >2 mm, creepage clearance: >3 mm
Output			
Contact type	4 changeover contacts / 4PDT	**General**	
Min. switching voltage	AC/DC 5 V	Connection type	Push-In
Max. switching voltage	AC/DC 250 V		2 × (0.20 mm² – 1.5 mm²)
Min. switching current	AC/DC 5 mA	Housing material	PA 6.6
Max. switching current	AC/DC 6 A	Color of the housing	Light grey
Switching capacity AC 15	1.5 A @ 120 V, 0.75 A @ 250 V	Degree of protection	IP20
Switching capacity DC 13	1.8 A @ 24 V, 220 mA @ 120 V, 100 mA @ 250 V	Mounting	DIN rail mountable TS35 (EN 60715)
Max. switching capacity	1500 VA	Insulation voltage input / output	1.5 kV_{eff}
Contact material	AgNi	Safe isolation	yes
Mechanical service life	> 2 x 10^7 operations	Operation temperature range	-40 °C … +70 °C
Switch-on delay	13 ms	Storage temperature range	-40 °C … +85 °C
Shutdown delay	3 ms	Dimensions (w × h × d)	31.0 mm × 97.0 mm × 75.8 mm
Protection device	None	Weight/unit	0.117 kg
		Certifications	cURus

Part No.	Type	Rated voltage U_N	Input voltage range	Rated current I_N A	Interrupting voltage	Power consumption	Protection device Input	PU (units)
Push-In 2 × (0.20 mm² – 1.5 mm²)								
770062	LCIS3-RSI12DC-PI-4U	DC 12 V	9.6 V – 13.2 V	0.09	<1.2 V	0.9 W	Free-wheeling diode	5
770063	LCIS3-RSI24DC-PI-4U	DC 24 V	19.2 V – 26.4 V	0.039	<2.4 V	0.9 W	Free-wheeling diode	5
770064	LCIS3-RSI-115AC-PI-4U	AC 115 V	96 V – 132 V	0.033	<24 V	1.6 VA	Varistor	5
770065	LCIS3-RSI-230AC-PI-4U	AC 230 V	184 V – 253 V	0.016	<24 V	1.6 VA	Varistor	5

Dimensions




Circuit diagram




DC version

Circuit diagram



AC version


Relay socket for miniature relay, pluggable relay
AC / DC 300 V
Push-In



Input		**General**	
Protection device Input	None	Housing material	PA 6.6
		Color of the housing	Light grey
Output		Degree of protection	IP20
Contact type	1 changeover contact/2 changeover contacts, depending on relay	Mounting	DIN rail mountable TS35 (EN 60715)
Max. switching voltage	AC/DC 300 V	Insulation voltage input / output	5.0 kV_{eff}
Max. switching current	AC/DC 16 A	Safe isolation	yes
Protection device	None	Operation temperature range	-40 °C … +70 °C
Clearance/creepage dist. (control/load side)	Air clearance: > 10 mm, creepage clearance: > 10 mm	Storage temperature range	-40 °C … +85 °C
		Dimensions (w × h × d)	15.9 mm × 97.0 mm × 45.9 mm
		Weight/unit	0.03
		Certifications	cURus

Part No.	Type	Rated voltage U_N	PU (units)
770901	LCIS2-RESP-PI	AC/DC 230 V	20

Dimensions




Relay socket for industrial relay, pluggable relay
AC / DC 250 V
Push-In



Input		Color of the housing	Light grey
Protection device Input	None	Degree of protection	IP20
		Mounting	DIN rail mountable TS35 (EN 60715)
Output		Insulation voltage input / output	1.5 kV_{eff}
Contact type	4 changeover contacts / 4PDT	Safe isolation	yes
Max. switching voltage	AC/DC 250 V	Operation temperature range	-40 °C … +70 °C
Max. switching current	AC/DC 6 A	Storage temperature range	-40 °C … +85 °C
Protection device	None	Dimensions (w × h × d)	31.0 mm × 97.0 mm × 45.9 mm
Clearance/creepage dist. (control/load side)	Air clearance: >2 mm, creepage clearance: >3 mm	Weight/unit	0.05 kg
		Connection type	Push-In 2 × (0.20 mm² – 1.5 mm²)
		Certifications	cURus
General			
Housing material	PA 6.6		

Part No.	Type	Rated voltage U_N	PU (units)
770904	LCIS3-RESI-PI	max. AC/DC 230 V	10

Dimensions



Holding bracket for relay socket LCIS2/3







General			
Housing material	PA 6.6	Operation temperature range	-40 °C … +70 °C
Color of the housing	Red	Storage temperature range	-40 °C … +85 °C

Part No.	Type	Dimensions (w × h × d)	Weight/unit kg	PU (units)
770932	LCIS2-CP	15.6 mm × 21.8 mm × 49.1 mm	0.005	10
770933	LCIS3-CI	25.7 mm × 25.3 mm × 48.7 mm	0.005	10


Dimensions




Use




Dimensions



Use




Pluggable LCIS23 protection modules
DC 6 – 24 V
Integrated protective circuit




Input		Color of the housing	Light grey
Rated current I_N	3 mA @ 12 V 6 mA @ 24 V	Degree of protection	IP20
		Operation temperature range	-40 °C … +70 °C
Protection device Input	Free-wheeling diode	Storage temperature range	-40 °C … +85 °C
		Dimensions (w × h × d)	12.8 mm × 12.5 mm × 32.0 mm
General		Weight/unit	0.01 kg
Housing material	PA 6.6		

Part No.	Type	Rated voltage U_N	PU (units)
770910	LCIS23-PM6/24DC	DC 12/24 V	20

Dimensions




Pluggable LCIS23 protection modules
AC/DC 115 – 230 V
Integrated protective circuit



Input		Color of the housing	Light grey
Rated current I_N	1.5 mA @ 115 V 3 mA @ 230 V	Degree of protection	IP20
		Operation temperature range	-40 °C … +70 °C
Protection device Input	Varistor	Storage temperature range	-40 °C … +85 °C
		Dimensions (w × h × d)	12.8 mm × 12.5 mm × 32.0 mm
General		Weight/unit	0.01 kg
Housing material	PA 6.6		

Part No.	Type	Rated voltage U_N	PU (units)
770915	LCIS23-PM115/230UP	AC/DC 115/230 V	20

Dimensions



Further product information at
www.luetze.com

Insulated jumper combs for LCIS relays / sockets
2- to 8-pin





General			
Material	PVC hard	Rated current	DC 6 A
Contact material	FeZn	Flamability according to UL 94	V0
Contact design	Flat contact 0.8 mm	Operation temperature range	-40 °C … +70 °C
Connection type	Plug-in	Storage temperature range	-40 °C … +85 °C

Part No.	Type	Pole number	Color	Pin spacing mm	Dimensions (w × h × d)	Weight/unit kg	PU (units)
770935	LCIS2-BKG-2	2	grey	13	25.5 mm × 21.0 mm × 5.0 mm	0.0008	20
770937	LCIS3-BKG-2	2	grey	28	30.5 mm × 21.0 mm × 5.0 mm	0.001	20
770938	LCIS23-BKG-2	2	grey	5	7.0 mm × 21.0 mm × 2.5 mm	0.0005	30
770934	LCIS2-BKG-8	8	grey	16	118.0 mm × 12.0 mm × 6.0 mm	0.0064	10
770936	LCIS3-BKG-8	8	grey	31	220.0 mm × 12.0 mm × 6.0 mm	0.009	10

Labeling system
Labeling tags 15 × 9.5 mm
single signs




RoHS halogen free

General			
Material	PA6.6 (UL 94 V2)	Operation temperature range	-40 °C … +100 °C
Flamability according to UL 94	V2	Storage temperature range	-40 °C … +100 °C

Part No.	Type	Color	Dimensions	Weight/unit kg	PU (units)
770939	LCIS23-BZW	white	15 × 9.5 mm	0.0005	50

Dimensions



Part number index

Part-No	Page
716431	50
716432	50
716433	50
716434	50
760019.0000	31
760019.1000	28
760020.0000	32
760020.0010	33
760020.1000	29
760020.1010	30
760021.0000	32
760021.0010	33
760021.1000	29
760021.1010	30
760023.0000	34
760023.0010	35
760024.0000	34
760024.0010	35
760051.0000	32
760051.0010	33
760051.1000	29
760051.1010	30
760054.0000	34
760054.0010	35
760061.0000	32
760061.0010	33
760061.1000	29
760061.1010	30
760064.0000	34
760064.0010	35
761019.0000	31
761019.1000	28
761020.0000	32
761020.0010	33
761020.1000	29
761020.1010	30
761021.0000	32
761021.0010	33
761021.1000	29
761021.1010	30
761023.0000	34
761023.0010	35
761024.0000	34
761024.0010	35
761051.0000	32
761051.0010	33
761051.1000	29
761051.1010	30
761054.0000	34
761054.0010	35
761061.0000	32
761061.0010	33
761061.1000	29
761061.1010	30
761064.0000	34
761064.0010	35
762803.1000	51
762813.1000	51
762823.1000	51
762833.1000	51
763020.0091	41
763020.0110	36
763020.0120	36
763020.0130	37
763020.0220	39
763020.0320	46
763020.0330	46
763020.0360	48
763020.0500	40
763020.1020	42
763020.1210	43
763020.2340	47
763050.0140	38
763070.1020	44
763080.0350	45
764020.0091	41
764020.0110	36
764020.0120	36
764020.0130	37
764020.0220	39
764020.0320	46
764020.0330	46
764020.0360	48
764020.0500	40
764020.1020	42
764020.1210	43
764020.2340	47
764050.0140	38
764070.1020	44
764080.0350	45
768001	49
768002	49
768003	49
768005	49
768006	49
768007	49
770042	53
770043	53
770044	53
770045	53
770052	54
770053	54
770054	54
770055	54
770062	55
770063	55
770064	55
770065	55
770901	56
770904	57
770910	59
770915	60
770932	58
770933	58
770934	61
770935	61
770936	61
770937	61
770938	61
770939	62
780981.000.2	50
780982.000.2	50
780983.000.2	50
780985.000.2	50

Notes

Notes

Notes

Copyright
Protected trademarks and trade names are not always labelled as such in this publication. This does not mean they are free names as defined in the trademark and brand mark law. Publication does not imply that the descriptions or pictures used are free from rights of third parties. The information is published without regard to possible patent protection. Trade names are used without any guarantee that they can be used freely. In putting together text, pictures and data, we proceeded with the greatest care. Despite this, the possibility of errors cannot be completely excluded. We therefore reject any legal responsibility or liability. We are, of course, grateful for any recommendations for improvement or information useful for making corrections or establishing the truth. But the author does not assume any responsibility for the content of these documents.

Cable Solutions
High flexing cables for industrial applications

Connectivity Solutions
Industrial Ethernet, assembled cables, Actuator Sensor Interface, connectors and suppression technology

Cabinet Solutions
*Air***STREAM** complete system for thermally optimized and space-saving cabinet wiring

Control Solutions
Industrial Power Supplies and electronic current control for Industrial Internet of Things. Infrastructure for industrial networks, signal converter, relays and modular electronics housing

Transportation Solutions
Solutions for the demanding Railway Sector, for example control technology, Interface solutions and signalling

Deutschland
Friedrich Lütze GmbH
Postfach 12 24 (PLZ 71366)
Bruckwiesenstraße 17-19
D-71384 Weinstadt
Tel.: +49 71 51 60 53-0
Fax: +49 71 51 60 53-277(-288)
info@luetze.de

Österreich
LÜTZE Elektrotechnische Erzeugnisse Ges.m.b.H.
Niedermoserstraße 18
A-1220 Wien
Tel.: +43 1 257 52 52-0
Fax: +43 1 257 52 52-20
office@luetze.at

Schweiz
LÜTZE AG
Oststraße 2
CH-8854 Siebnen
Tel.: +41 55 450 23 23
Fax: +41 55 450 23 13
info@luetze.ch

USA
LUTZE INC.
info@lutze.com

Großbritannien
LUTZE Ltd.
sales.gb@lutze.co.uk

Frankreich
LUTZE SASU
info@lutze.fr

Spanien
LUTZE, S.L.
info@lutze.es

China
Luetze Trading (Shanghai) Co.Ltd.
info@luetze.cn

07.2024.P2DB09.EN.1000.02.33 • © by Friedrich Lütze GmbH, Weinstadt, Deutschland • Printed in Germany. Subject to technical modification.

Innovations-Allianz Green Carbody Technologies

Environmental Management ISO 14001

RoHS

www.luetze.com

LÜTZE TECHNIK MIT SYSTEM